



MÜLLER  
SAFE



HIGH SECURITY SAFES



MÜLLER  
SAFE

## HIGH SECURITY SAFE EV 0



Model EV 0-160



### SECURITY LEVEL

Class 0 according to EN 1143-1  
certified by ECB-S



### DESIGN

**Body:** Multi-walled with special reinforcement  
**Door:** Multi-walled  
**Hinges:** External  
**Door opening angle:** 180°  
**Handle/fitting:** Protruding 65 mm  
**Mounting holes:** 1 fixing hole in the floor  
(2 fixing holes in the floor, if 2-leafs)



### LOCKING

High security double-bit key lock  
2 keys (95 mm)



### PAINTING

Light gray, RAL 7035  
(special painting according to RAL colors for an extra charge)




### INSURABLE

Individual agreement



HIGH SECURITY SAFES

# HIGH SECURITY SAFE EV 0

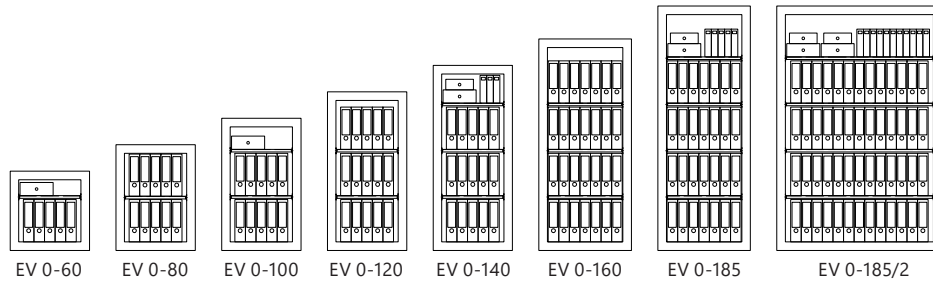

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
EV 0-60	600	600	500	470	460	360	470	460	1	1-leaf	5	77	129
EV 0-80	800	600	500	670	460	360	670	460	2	1-leaf	10	111	165
EV 0-100	1000	600	500	870	460	360	870	460	2	1-leaf	10	144	185
EV 0-120	1200	600	500	1070	460	360	1070	460	3	1-leaf	15	177	240
EV 0-140	1400	600	500	1270	460	360	1270	460	3	1-leaf	15	210	260
EV 0-160	1600	700	500	1470	560	360	1470	560	3	1-leaf	28	298	330
EV 0-185	1850	700	500	1720	560	360	1670	560	4	1-leaf	32	337	410
EV 0-185/2	1850	1250	500	1720	1110	360	1670	1110	4	2-leafs	52	667	695

Fittings protrude 65 mm



## LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
EV 0-60	■	■	■	■	■
EV 0-80	■	■	■	■	■
EV 0-100	■	■	■	■	■
EV 0-120	■	■	■	■	■
EV 0-140	■	■	■	■	■
EV 0-160	■	■	■	■	■
EV 0-185	■	■	■	■	■
EV 0-185/2	■	■	■	■	■

\* with emergency key \*\* other lock combinations possible



## ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 350 mm	Inner safe Height = 350 mm (2-leaf)	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EV 0-60	□	□	□	■	■	■	■
EV 0-80	□	□	□	■	■	■	■
EV 0-100	■	□	□	■	■	■	■
EV 0-120	■	□	□	■	■	■	■
EV 0-140	■	□	□	■	■	■	■
EV 0-160	□	■	□	■	■	■	■
EV 0-185	□	■	□	■	■	■	■
EV 0-185/2	□	□	■	□	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



# HIGH SECURITY SAFES

**Müller Safe GmbH**

In der Hirtenwiese 6

35745 Herborn, Germany

[www.mueller-safe.de](http://www.mueller-safe.de)

