



MÜLLER
SAFE



HIGH SECURITY SAFES

HIGH SECURITY SAFE EN 0



Model EN 0-160



SECURITY LEVEL

Class 0 according to EN 1143-1
certified by ECB-S



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor
(2 fixing holes in the floor, if 2-leafs)



LOCKING

High security double-bit key lock
2 keys (150 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



HIGH SECURITY SAFE EN 0

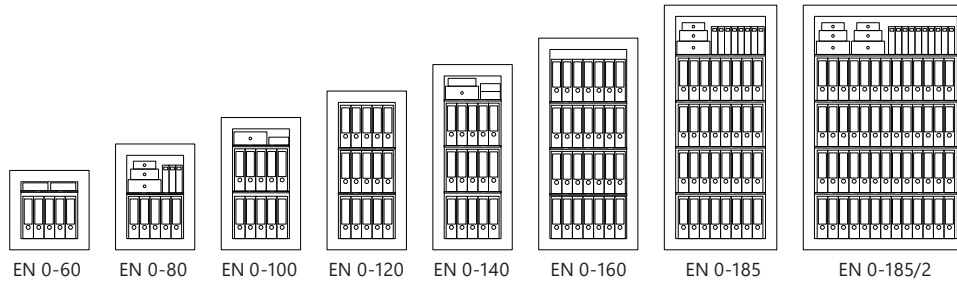

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1/2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
EN 0-60	600	600	560	430	430	335	430	430	1	1-leaf	5	61	135
EN 0-80	800	600	560	630	430	335	630	430	2	1-leaf	5	90	170
EN 0-100	1000	600	560	830	430	335	830	430	2	1-leaf	10	119	195
EN 0-120	1200	600	560	1030	430	335	1030	430	3	1-leaf	15	148	218
EN 0-140	1400	600	560	1230	430	335	1230	430	3	1-leaf	15	177	265
EN 0-160	1600	750	600	1430	580	375	1430	580	3	1-leaf	28	311	355
EN 0-185	1850	850	650	1680	680	425	1680	680	4	1-leaf	32	485	455
EN 0-185/2	1850	1250	650	1680	1080	425	1680	1080	4	2-leafs	52	771	645

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)	
EN 0-60	■	■	■	■	■
EN 0-80	■	■	■	■	■
EN 0-100	■	■	■	■	■
EN 0-120	■	■	■	■	■
EN 0-140	■	■	■	■	■
EN 0-160	■	■	■	■	■
EN 0-185	■	■	■	■	■
EN 0-185/2	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 300 mm	Inner safe Height = 350 mm (2-leaf)	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EN 0-60	□	□	□	■	■	■	■
EN 0-80	□	□	□	■	■	■	■
EN 0-100	■	□	□	■	■	■	■
EN 0-120	■	□	□	■	■	■	■
EN 0-140	■	□	□	■	■	■	■
EN 0-160	■	□	□	■	■	■	■
EN 0-185	□	■	□	■	■	■	■
EN 0-185/2	□	□	■	□	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de

