



**MÜLLER  
SAFE**



**HIGH SECURITY SAFES**



## HIGH SECURITY SAFE EN I



Model EN I-160



### SECURITY LEVEL

Class I according to EN 1143-1  
certified by ECB-S



### DESIGN

**Body:** Multi-walled with special reinforcement  
**Door:** Multi-walled  
**Hinges:** External  
**Door opening angle:** 180°  
**Handle/fitting:** Protruding 65 mm  
**Mounting holes:** 1 fixing hole in the floor  
(2 fixing holes in the floor, if 2-leafs)



### LOCKING

High security double-bit key lock  
2 keys (150 mm)



### PAINTING

Light gray, RAL 7035  
(special painting according to RAL colors for an extra charge)




### INSURABLE

Individual agreement



## HIGH SECURITY SAFES

# HIGH SECURITY SAFE EN I

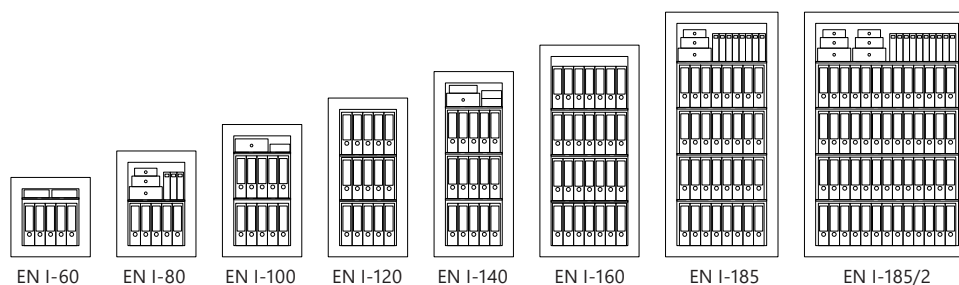

| Model      | External dim. in mm |       |       | Internal dim. in mm |       |       | Door light |       | Number Shelves | Door 1 / 2-leaf | Number Files | Volume (Liter) | Weight (Kg) |
|------------|---------------------|-------|-------|---------------------|-------|-------|------------|-------|----------------|-----------------|--------------|----------------|-------------|
|            | Height              | Width | Depth | Height              | Width | Depth | Height     | Width |                |                 |              |                |             |
| EN I-60    | 600                 | 600   | 560   | 430                 | 430   | 335   | 430        | 430   | 1              | 1-leaf          | 5            | 61             | 135         |
| EN I-80    | 800                 | 600   | 560   | 630                 | 430   | 335   | 630        | 430   | 2              | 1-leaf          | 5            | 90             | 170         |
| EN I-100   | 1000                | 600   | 560   | 830                 | 430   | 335   | 830        | 430   | 2              | 1-leaf          | 10           | 119            | 195         |
| EN I-120   | 1200                | 600   | 560   | 1030                | 430   | 335   | 1030       | 430   | 3              | 1-leaf          | 15           | 148            | 218         |
| EN I-140   | 1400                | 600   | 560   | 1230                | 430   | 335   | 1230       | 430   | 3              | 1-leaf          | 15           | 177            | 265         |
| EN I-160   | 1600                | 750   | 600   | 1430                | 580   | 375   | 1430       | 580   | 3              | 1-leaf          | 28           | 311            | 355         |
| EN I-185   | 1850                | 850   | 650   | 1680                | 680   | 425   | 1680       | 680   | 4              | 1-leaf          | 32           | 485            | 455         |
| EN I-185/2 | 1850                | 1250  | 650   | 1680                | 1080  | 425   | 1680       | 1080  | 4              | 2-leafs         | 52           | 771            | 645         |

Fittings protrude 65 mm



## LOCKING OPTIONS

|            | Standardlocking     | Optional locking systems    |                              |                                        |
|------------|---------------------|-----------------------------|------------------------------|----------------------------------------|
| Model      | Double-bit key lock | Mechanical combination lock | Electronic combination lock* | Double lock** (2 Double-bit key locks) |
| EN I-60    | ■                   | ■                           | ■                            | ■                                      |
| EN I-80    | ■                   | ■                           | ■                            | ■                                      |
| EN I-100   | ■                   | ■                           | ■                            | ■                                      |
| EN I-120   | ■                   | ■                           | ■                            | ■                                      |
| EN I-140   | ■                   | ■                           | ■                            | ■                                      |
| EN I-160   | ■                   | ■                           | ■                            | ■                                      |
| EN I-185   | ■                   | ■                           | ■                            | ■                                      |
| EN I-185/2 | ■                   | ■                           | ■                            | ■                                      |

\* with emergency key \*\* other lock combinations possible



## ACCESSORIES FOR EXTRA CHARGE

| Model      | Inner safe Height = 200 mm | Inner safe Height = 300 mm | Inner safe Height = 350 mm (2-leaf) | Left door hinge | Additional shelf | Additional fixing hole for designated position Ø 13 mm | Special fixing kit for concrete floor |
|------------|----------------------------|----------------------------|-------------------------------------|-----------------|------------------|--------------------------------------------------------|---------------------------------------|
| EN I-60    | □                          | □                          | □                                   | ■               | ■                | ■                                                      | ■                                     |
| EN I-80    | □                          | □                          | □                                   | ■               | ■                | ■                                                      | ■                                     |
| EN I-100   | ■                          | □                          | □                                   | ■               | ■                | ■                                                      | ■                                     |
| EN I-120   | ■                          | □                          | □                                   | ■               | ■                | ■                                                      | ■                                     |
| EN I-140   | ■                          | □                          | □                                   | ■               | ■                | ■                                                      | ■                                     |
| EN I-160   | ■                          | □                          | □                                   | ■               | ■                | ■                                                      | ■                                     |
| EN I-185   | □                          | ■                          | □                                   | ■               | ■                | ■                                                      | ■                                     |
| EN I-185/2 | □                          | □                          | ■                                   | □               | ■                | ■                                                      | ■                                     |

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



# HIGH SECURITY SAFES

**Müller Safe GmbH**

In der Hirtenwiese 6

35745 Herborn, Germany

[www.mueller-safe.de](http://www.mueller-safe.de)

