



**MÜLLER
SAFE**



KEY SAFES

KEY SAFE MST 0



Model MST 0-100



SECURITY LEVEL

Class 0 to EN 1143-1
certified by ECB-S



DESIGN

Body: Double-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Mounting holes: 1 fixing hole in the floor

Also available as a version for car keys (longer hooks).



LOCKING

High security double-bit key lock
2 keys (95 mm)




PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



KEY SAFE MST 0

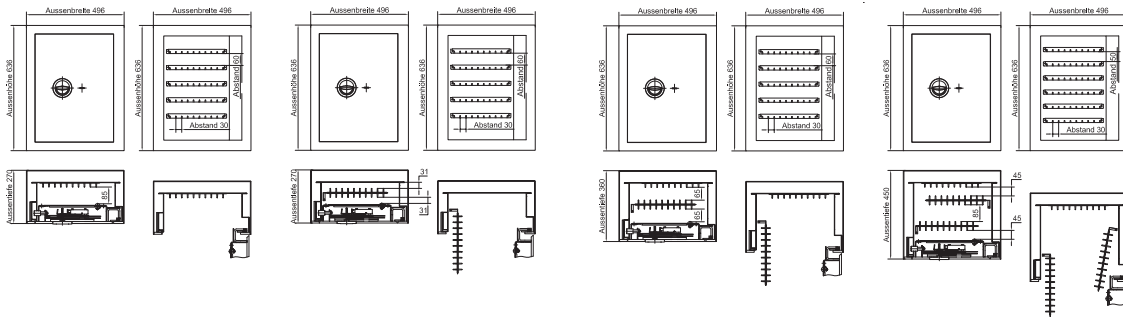

MST 0-50

MST 0-100

MST 0-150

MST 0-300

Model	External dim. in mm			Distribution of the key bars	Number Hooks	Door 1 / 2-leaf	Weight (Kg)
	Height	Width	Depth				
MST 0-50	636	496	270	5 bars with 10 hooks each on the back wall	max. 50	1-leaf	85
MST 0-100	636	496	270	1 partition wall, 5 strips per side, each with 10 hooks	max. 100	1-leaf	90
MST 0-150	636	496	360	5 strips with each 10 hook backwall, 1 partition wall, 5 bars per side with 10 hooks each	max. 150	1-leaf	112
MST 0-300	636	496	450	6 strips with 10 hooks each on the back wall; 2 partition walls, per side 6 strips with 10 hooks each	max. 300	1-leaf	126



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
MST 0-50	■	■	■	■	■
MST 0-100	■	■	■	■	■
MST 0-150	■	■	■	■	■
MST 0-300	■	■	■	■	■

* with emergency key, protruding approx 25 mm **other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Base (closed) up to a height of 900 mm	Left door hinge	Additional fixing hole for designated position $\varnothing = 13$ mm	Spezial fixing kit for concrete floor
MST 0-50	■	■	■	■
MST 0-100	■	■	■	■
MST 0-150	■	■	■	■
MST 0-300	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



KEY SAFES

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de

