



MÜLLER
SAFE



HIGH SECURITY SAFES

HIGH SECURITY SAFE EN II



Model EN II-100



SECURITY LEVEL

Class II according to EN 1143-1
certified by ECB-S



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor
(2 fixing holes in the floor, if 2-leafs)



LOCKING

High security double-bit key lock
2 keys (150 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



HIGH SECURITY SAFE EN II

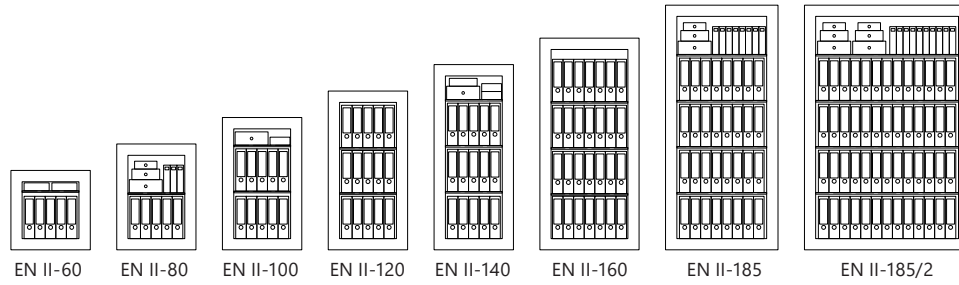

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1/2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
EN II-60	600	600	560	430	430	335	430	430	1	1-leaf	5	61	320
EN II-80	800	600	560	630	430	335	630	430	2	1-leaf	5	90	405
EN II-100	1000	600	560	830	430	335	830	430	2	1-leaf	10	119	503
EN II-120	1200	600	560	1030	430	335	1030	430	3	1-leaf	15	148	570
EN II-140	1400	600	560	1230	430	335	1230	430	3	1-leaf	15	177	615
EN II-160	1600	750	600	1430	580	375	1430	580	3	1-leaf	28	311	860
EN II-185	1850	850	650	1680	680	425	1680	680	4	1-leaf	32	485	1168
EN II-185/2	1850	1250	650	1680	1080	425	1680	1080	4	2-leafs	52	771	1568

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)	
EN II-60	■	■	■	■	■
EN II-80	■	■	■	■	■
EN II-100	■	■	■	■	■
EN II-120	■	■	■	■	■
EN II-140	■	■	■	■	■
EN II-160	■	■	■	■	■
EN II-185	■	■	■	■	■
EN II-185/2	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 300 mm	Inner safe Height = 350 mm (2-leaf)	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EN II-60	□	□	□	■	■	■	■
EN II-80	□	□	□	■	■	■	■
EN II-100	■	□	□	■	■	■	■
EN II-120	■	□	□	■	■	■	■
EN II-140	■	□	□	■	■	■	■
EN II-160	■	■	□	■	■	■	■
EN II-185	□	□	□	■	■	■	■
EN II-185/2	□	□	■	□	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de

