



MÜLLER
SAFE



HIGH SECURITY SAFES

HIGH SECURITY SAFE GA



Model GA 95



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB-S



DESIGN

Body: Double-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: up to a height of 950 mm with a knob, from a height of 1130 mm with a handle, protruding approx. 65 mm
Mounting hole: 1 fixing hole in the floor



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



HIGH SECURITY SAFE GA

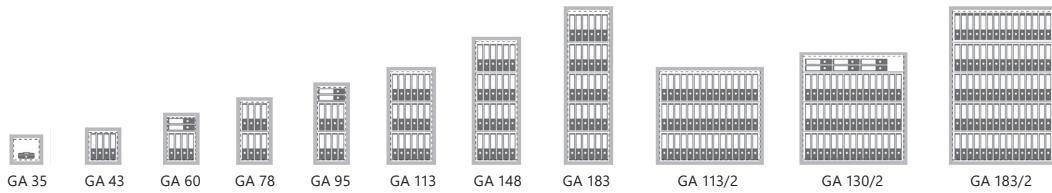

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
GA 35	350	390	265	300	330	155	238	294	1	1-leaf	-	15	41
GA 43	430	420	445	380	360	335	318	324	1	1-leaf	4	48	61
GA 60	600	420	445	550	360	335	488	324	1	1-leaf	6	66	76
GA 78	780	420	445	730	360	335	668	324	1	1-leaf	8	88	91
GA 95	950	420	445	900	360	335	838	324	2	1-leaf	10	109	107
GA 113	1130	570	485	1080	510	375	1018	474	2	1-leaf	18	207	153
GA 148	1480	570	485	1430	510	375	1368	474	3	1-leaf	24	273	189
GA 183	1830	570	485	1780	510	375	1718	474	4	1-leaf	30	340	225
GA 113/2	1130	1245	485	1080	1185	375	1018	1165	2	2-leafs	45	480	268
GA 130/2	1300	1245	485	1250	1185	375	1188	1165	3	2-leafs	51	555	296
GA 183/2	1830	1245	600	1780	1185	490	1718	1165	4	2-leafs	75	1034	415

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Double-bit key lock	Mechanical combination lock	Electronic combination lock*	Electronic combination lock**
GA 35	■	□	■	■	□
GA 43	■	□	■	■	■
GA 60	■	□	■	■	■
GA 78	■	□	■	■	■
GA 95	■	□	■	■	■
GA 113	□	■	■	■	■
GA 148	□	■	■	■	■
GA 183	□	■	■	■	■
GA 113/2	□	■	■	■	■
GA 130/2	□	■	■	■	■
GA 183/2	□	■	■	■	■

* with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 350 mm (2-leafs)	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
GA 35	□	□	■	■	■	■
GA 43	□	□	■	■	■	■
GA 60	■	□	■	■	■	■
GA 78	■	□	■	■	■	■
GA 95	■	□	■	■	■	■
GA 113	■	□	■	■	■	■
GA 148	■	□	■	■	■	■
GA 183	■	□	■	■	■	■
GA 113/2	□	■	□	■	■	■
GA 130/2	□	■	□	■	■	■
GA 183/2	□	■	□	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



MÜLLER
SAFE

HIGH SECURITY SAFE EV 0



Model EV 0-160



SECURITY LEVEL

Class 0 according to EN 1143-1
certified by ECB-S



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor
(2 fixing holes in the floor, if 2-leafs)



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



HIGH SECURITY SAFES

HIGH SECURITY SAFE EV 0

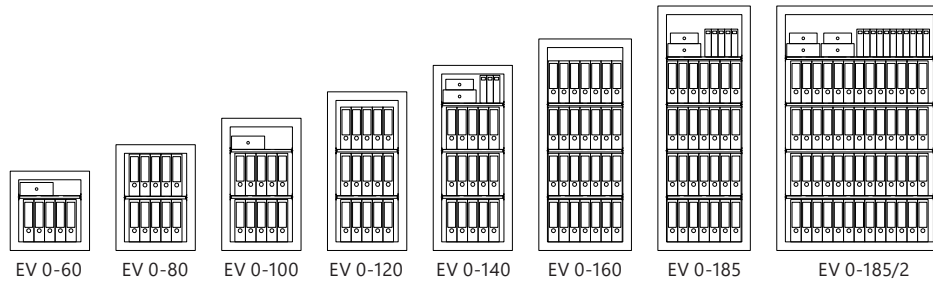

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
EV 0-60	600	600	500	470	460	360	470	460	1	1-leaf	5	77	129
EV 0-80	800	600	500	670	460	360	670	460	2	1-leaf	10	111	165
EV 0-100	1000	600	500	870	460	360	870	460	2	1-leaf	10	144	185
EV 0-120	1200	600	500	1070	460	360	1070	460	3	1-leaf	15	177	240
EV 0-140	1400	600	500	1270	460	360	1270	460	3	1-leaf	15	210	260
EV 0-160	1600	700	500	1470	560	360	1470	560	3	1-leaf	28	298	330
EV 0-185	1850	700	500	1720	560	360	1670	560	4	1-leaf	32	337	410
EV 0-185/2	1850	1250	500	1720	1110	360	1670	1110	4	2-leafs	52	667	695

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
EV 0-60	■	■	■	■	■
EV 0-80	■	■	■	■	■
EV 0-100	■	■	■	■	■
EV 0-120	■	■	■	■	■
EV 0-140	■	■	■	■	■
EV 0-160	■	■	■	■	■
EV 0-185	■	■	■	■	■
EV 0-185/2	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 350 mm	Inner safe Height = 350 mm (2-leaf)	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EV 0-60	□	□	□	■	■	■	■
EV 0-80	□	□	□	■	■	■	■
EV 0-100	■	□	□	■	■	■	■
EV 0-120	■	□	□	■	■	■	■
EV 0-140	■	□	□	■	■	■	■
EV 0-160	□	■	□	■	■	■	■
EV 0-185	□	■	□	■	■	■	■
EV 0-185/2	□	□	■	□	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES



MÜLLER
SAFE

HIGH SECURITY SAFE EV I



Model EV I-160



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB-S



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor
(2 fixing holes in the floor, if 2-leafs)



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



HIGH SECURITY SAFES

HIGH SECURITY SAFE EV I

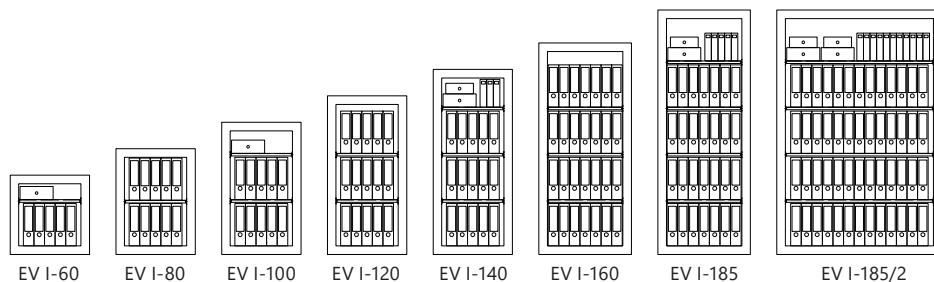

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1/2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
EV I-60	600	600	500	470	460	360	470	460	1	1-leaf	5	77	129
EV I-80	800	600	500	670	460	360	670	460	2	1-leaf	10	111	165
EV I-100	1000	600	500	870	460	360	870	460	2	1-leaf	10	144	185
EV I-120	1200	600	500	1070	460	360	1070	460	3	1-leaf	15	177	240
EV I-140	1400	600	500	1270	460	360	1270	460	3	1-leaf	15	210	260
EV I-160	1600	700	500	1470	560	360	1470	560	3	1-leaf	28	298	330
EV I-185	1850	700	500	1720	560	360	1720	560	4	1-leaf	32	337	410
EV I-185/2	1850	1250	500	1720	1110	360	1720	1110	4	2-leafs	52	667	695

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems			
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
EV I-60	■	■	■	■	■
EV I-80	■	■	■	■	■
EV I-100	■	■	■	■	■
EV I-120	■	■	■	■	■
EV I-140	■	■	■	■	■
EV I-160	■	■	■	■	■
EV I-185	■	■	■	■	■
EV I-185/2	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 350 mm	Inner safe Height = 350 mm (2-leaf)	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EV I-60	□	□	□	■	■	■	■
EV I-80	□	□	□	■	■	■	■
EV I-100	■	□	□	■	■	■	■
EV I-120	■	□	□	■	■	■	■
EV I-140	■	□	□	■	■	■	■
EV I-160	□	■	□	■	■	■	■
EV I-185	□	■	□	■	■	■	■
EV I-185/2	□	□	■	□	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES



HIGH SECURITY SAFE EN 0



Model EN 0-160



SECURITY LEVEL

Class 0 according to EN 1143-1
certified by ECB-S



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor
(2 fixing holes in the floor, if 2-leafs)



LOCKING

High security double-bit key lock
2 keys (150 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



HIGH SECURITY SAFES

HIGH SECURITY SAFE EN 0

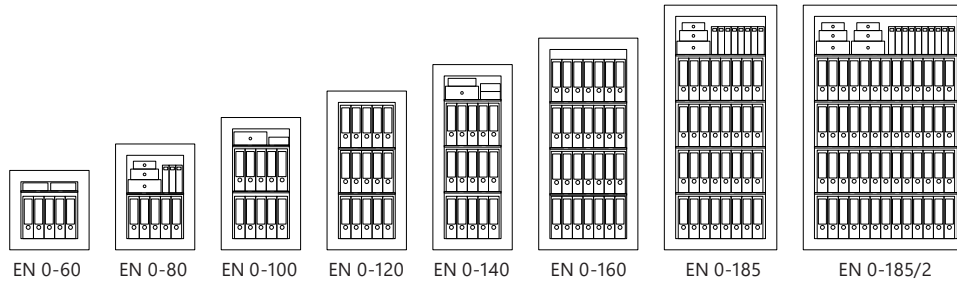

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1/2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
EN 0-60	600	600	560	430	430	335	430	430	1	1-leaf	5	61	135
EN 0-80	800	600	560	630	430	335	630	430	2	1-leaf	5	90	170
EN 0-100	1000	600	560	830	430	335	830	430	2	1-leaf	10	119	195
EN 0-120	1200	600	560	1030	430	335	1030	430	3	1-leaf	15	148	218
EN 0-140	1400	600	560	1230	430	335	1230	430	3	1-leaf	15	177	265
EN 0-160	1600	750	600	1430	580	375	1430	580	3	1-leaf	28	311	355
EN 0-185	1850	850	650	1680	680	425	1680	680	4	1-leaf	32	485	455
EN 0-185/2	1850	1250	650	1680	1080	425	1680	1080	4	2-leafs	52	771	645

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)	
EN 0-60	■	■	■	■	■
EN 0-80	■	■	■	■	■
EN 0-100	■	■	■	■	■
EN 0-120	■	■	■	■	■
EN 0-140	■	■	■	■	■
EN 0-160	■	■	■	■	■
EN 0-185	■	■	■	■	■
EN 0-185/2	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 300 mm	Inner safe Height = 350 mm (2-leaf)	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EN 0-60	□	□	□	■	■	■	■
EN 0-80	□	□	□	■	■	■	■
EN 0-100	■	□	□	■	■	■	■
EN 0-120	■	□	□	■	■	■	■
EN 0-140	■	□	□	■	■	■	■
EN 0-160	■	□	□	■	■	■	■
EN 0-185	□	■	□	■	■	■	■
EN 0-185/2	□	□	■	□	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE EN I



Model EN I-160



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB-S



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor
(2 fixing holes in the floor, if 2-leafs)



LOCKING

High security double-bit key lock
2 keys (150 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



HIGH SECURITY SAFE EN I

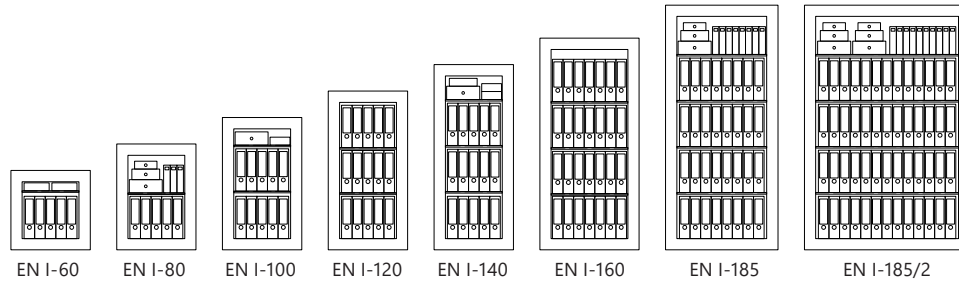

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1/2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
EN I-60	600	600	560	430	430	335	430	430	1	1-leaf	5	61	135
EN I-80	800	600	560	630	430	335	630	430	2	1-leaf	5	90	170
EN I-100	1000	600	560	830	430	335	830	430	2	1-leaf	10	119	195
EN I-120	1200	600	560	1030	430	335	1030	430	3	1-leaf	15	148	218
EN I-140	1400	600	560	1230	430	335	1230	430	3	1-leaf	15	177	265
EN I-160	1600	750	600	1430	580	375	1430	580	3	1-leaf	28	311	355
EN I-185	1850	850	650	1680	680	425	1680	680	4	1-leaf	32	485	455
EN I-185/2	1850	1250	650	1680	1080	425	1680	1080	4	2-leafs	52	771	645

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)	
EN I-60	■	■	■	■	■
EN I-80	■	■	■	■	■
EN I-100	■	■	■	■	■
EN I-120	■	■	■	■	■
EN I-140	■	■	■	■	■
EN I-160	■	■	■	■	■
EN I-185	■	■	■	■	■
EN I-185/2	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 300 mm	Inner safe Height = 350 mm (2-leaf)	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EN I-60	□	□	□	■	■	■	■
EN I-80	□	□	□	■	■	■	■
EN I-100	■	□	□	■	■	■	■
EN I-120	■	□	□	■	■	■	■
EN I-140	■	□	□	■	■	■	■
EN I-160	■	□	□	■	■	■	■
EN I-185	□	■	□	■	■	■	■
EN I-185/2	□	□	■	□	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE EN II



Model EN II-100



SECURITY LEVEL

Class II according to EN 1143-1
certified by ECB-S



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor
(2 fixing holes in the floor, if 2-leafs)



LOCKING

High security double-bit key lock
2 keys (150 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



HIGH SECURITY SAFE EN II

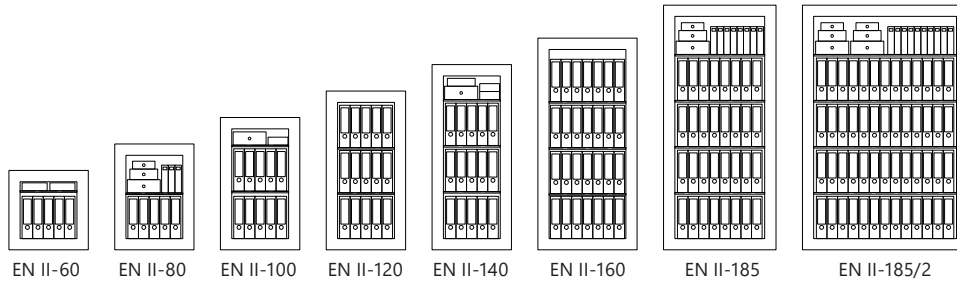

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1/2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
EN II-60	600	600	560	430	430	335	430	430	1	1-leaf	5	61	320
EN II-80	800	600	560	630	430	335	630	430	2	1-leaf	5	90	405
EN II-100	1000	600	560	830	430	335	830	430	2	1-leaf	10	119	503
EN II-120	1200	600	560	1030	430	335	1030	430	3	1-leaf	15	148	570
EN II-140	1400	600	560	1230	430	335	1230	430	3	1-leaf	15	177	615
EN II-160	1600	750	600	1430	580	375	1430	580	3	1-leaf	28	311	860
EN II-185	1850	850	650	1680	680	425	1680	680	4	1-leaf	32	485	1168
EN II-185/2	1850	1250	650	1680	1080	425	1680	1080	4	2-leafs	52	771	1568

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)	
EN II-60	■	■	■	■	■
EN II-80	■	■	■	■	■
EN II-100	■	■	■	■	■
EN II-120	■	■	■	■	■
EN II-140	■	■	■	■	■
EN II-160	■	■	■	■	■
EN II-185	■	■	■	■	■
EN II-185/2	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 300 mm	Inner safe Height = 350 mm (2-leaf)	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EN II-60	□	□	□	■	■	■	■
EN II-80	□	□	□	■	■	■	■
EN II-100	■	□	□	■	■	■	■
EN II-120	■	□	□	■	■	■	■
EN II-140	■	□	□	■	■	■	■
EN II-160	■	■	□	■	■	■	■
EN II-185	□	□	□	■	■	■	■
EN II-185/2	□	□	■	□	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE EN III



Model EN III-100



SECURITY LEVEL

Class III according to EN 1143-1
certified by ECB-S



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mouting holes: 2 fixing holes in the floor



LOCKING

High security double-bit key lock
2 keys (190 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



HIGH SECURITY SAFE EN III

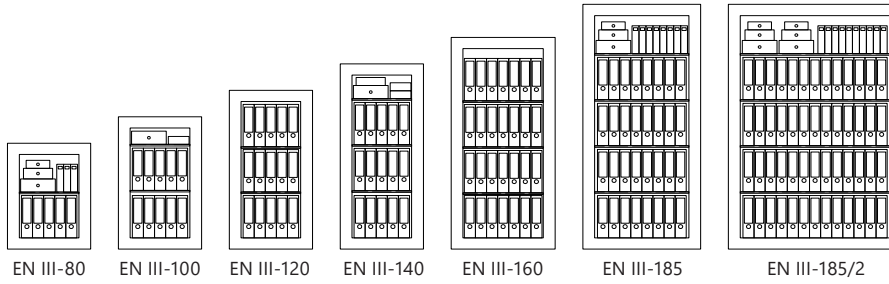

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
EN III-80	800	600	590	630	430	340	630	430	2	1-leaf	5	92	505
EN III-100	1000	600	590	830	430	340	830	430	2	1-leaf	10	121	615
EN III-120	1200	600	590	1030	430	340	1030	430	3	1-leaf	15	150	715
EN III-140	1400	600	590	1230	430	340	1230	430	3	1-leaf	15	179	780
EN III-160	1600	750	630	1430	580	380	1430	580	3	1-leaf	28	315	1120
EN III-185	1850	850	680	1680	680	430	1680	680	4	1-leaf	32	491	1490
EN III-185/2	1850	1250	680	1680	1080	430	1680	1080	4	2-leaves	52	780	1960

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
EN III-80	■	■	■	■
EN III-100	■	■	■	■
EN III-120	■	■	■	■
EN III-140	■	■	■	■
EN III-160	■	■	■	■
EN III-185	■	■	■	■
EN III-185/2	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 300 mm	Inner safe Height = 350 mm (2-leaf)	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EN III-80	□	□	□	■	■	■	■
EN III-100	■	□	□	■	■	■	■
EN III-120	■	□	□	■	■	■	■
EN III-140	■	□	□	■	■	■	■
EN III-160	■	□	□	■	■	■	■
EN III-185	□	■	□	■	■	■	■
EN III-185/2	□	□	■	□	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE EW II



Model EW II-105



SECURITY LEVEL

Class II according to EN 1143-1
certified by ECB-S and VdS



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 145°
Handle/fitting: Protruding 65 mm
Mounting holes: 2 fixing holes in the floor
Prepared for alarm system



LOCKING

High security double-bit key lock
3 keys (190 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



HIGH SECURITY SAFE EW II



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width*	Depth	Height	Width					
EW II-62	620	570	520	540	490	360	540	490	1	1-leaf	6	95	300
EW II-84	840	570	520	760	490	360	760	490	1	1-leaf	12	134	375
EW II-105	1050	570	520	970	490	360	970	490	2	1-leaf	12	171	450
EW II-120	1200	570	520	1120	490	360	1120	490	2	1-leaf	18	198	505
EW II-156	1560	810	540	1480	730	380	1480	730	3	1-leaf	36	411	805
EW II-187	1870	810	540	1790	730	380	1790	730	4	1-leaf	36	497	925

Fittings protrude 65 mm * Inside width: -15 mm can be used because of the shelf strip



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)	Double lock** (Double-bit key lock, Mechanical combination lock)
EW II-62	■	■	■	■	■
EW II-84	■	■	■	■	■
EW II-105	■	■	■	■	■
EW II-120	■	■	■	■	■
EW II-156	■	■	■	■	■
EW II-187	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 300 mm	Left door hinge	Additional shelf	Alarm accessories for alarm system	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EW II-62	<input type="checkbox"/>	<input type="checkbox"/>	■	■	■	■	■
EW II-84	<input type="checkbox"/>	<input type="checkbox"/>	■	■	■	■	■
EW II-105	■	<input type="checkbox"/>	■	■	■	■	■
EW II-120	■	<input type="checkbox"/>	■	■	■	■	■
EW II-156	<input type="checkbox"/>	■	■	■	■	■	■
EW II-187	<input type="checkbox"/>	■	■	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE **EW III**



Model EW III-105



SECURITY LEVEL

Class III according to EN 1143-1
certified by ECB-S and VdS



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 145°
Handle/fitting: Protruding 65 mm
Mounting holes: 2 fixing holes in the floor
Prepared for alarm system



LOCKING

High security double-bit key lock
3 keys (190 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



HIGH SECURITY SAFE EW III



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width*	Depth	Height	Width					
EW III-62	620	570	520	540	490	360	540	490	1	1-leaf	6	95	305
EW III-84	840	570	520	760	490	360	760	490	1	1-leaf	12	134	380
EW III-105	1050	570	520	970	490	360	970	490	2	1-leaf	12	171	465
EW III-120	1200	570	520	1120	490	360	1120	490	2	1-leaf	18	198	515
EW III-156	1560	810	540	1480	730	380	1480	730	3	1-leaf	36	411	820
EW III-187	1870	810	540	1790	730	380	1790	730	4	1-leaf	36	497	940

Fittings protrude 65 mm * Inside width: -15 mm can be used because of the shelf strip



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)	Doppelverschluss** (Double-bit key lock, Mechanical combination lock)
EW III-62	■	■	■	■	■
EW III-84	■	■	■	■	■
EW III-105	■	■	■	■	■
EW III-120	■	■	■	■	■
EW III-156	■	■	■	■	■
EW III-187	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 300 mm	Left door hinge	Additional shelf	Alarm accessories for alarm system	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EW III-62	<input type="checkbox"/>	<input type="checkbox"/>	■	■	■	■	■
EW III-84	<input type="checkbox"/>	<input type="checkbox"/>	■	■	■	■	■
EW III-105	■	<input type="checkbox"/>	■	■	■	■	■
EW III-120	■	<input type="checkbox"/>	■	■	■	■	■
EW III-156	<input type="checkbox"/>	■	■	■	■	■	■
EW III-187	<input type="checkbox"/>	■	■	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE EW IV



Model EW IV-120



SECURITY LEVEL

Class IV according to EN 1143-1
certified by ECB-S and VdS



DESIGN

Body: Double-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 145°
Handle/fitting: Protruding 65 mm
Mounting holes: 2 fixing holes in the floor
Prepared for alarm system



LOCKING

2 high security double-bit key locks
each 3 keys (190 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



HIGH SECURITY SAFE EW IV



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width*	Depth	Height	Width					
EW IV-62	620	570	520	540	490	360	540	490	1	1-leaf	6	95	310
EW IV-84	840	570	520	760	490	360	760	490	1	1-leaf	12	134	395
EW IV-105	1050	570	520	970	490	360	970	490	2	1-leaf	12	171	480
EW IV-120	1200	570	520	1120	490	360	1120	490	2	1-leaf	18	198	535
EW IV-156	1560	810	540	1480	730	380	1480	730	3	1-leaf	36	411	830
EW IV-187	1870	810	540	1790	730	380	1790	730	4	1-leaf	36	497	960

Fittings protrude 65 mm * Inside width: -15 mm can be used because of the shelf strip



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
	Double-bit key lock* (2 pieces)	Double lock* (Double-bit key lock, Mechanical combination lock)	Double lock* (2 electronic combination locks)**
EW IV-62	■	■	■
EW IV-84	■	■	■
EW IV-105	■	■	■
EW IV-120	■	■	■
EW IV-156	■	■	■
EW IV-187	■	■	■

* other lock combinations possible ** with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 300 mm	Left door hinge	Additional shelf	Alarm accessories for alarm system	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EW IV-62	<input type="checkbox"/>	<input type="checkbox"/>	■	■	■	■	■
EW IV-84	<input type="checkbox"/>	<input type="checkbox"/>	■	■	■	■	■
EW IV-105	■	<input type="checkbox"/>	■	■	■	■	■
EW IV-120	■	<input type="checkbox"/>	■	■	■	■	■
EW IV-156	<input type="checkbox"/>	■	■	■	■	■	■
EW IV-187	<input type="checkbox"/>	■	■	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE **EW V**



Model EW V-124



SECURITY LEVEL

Class V according to EN 1143-1
certified by ECB-S and VdS



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 145°
Handle/fitting: Protruding 65 mm
Mounting holes: 2 fixing holes in the floor
Prepared for alarm system



LOCKING

2 high security double-bit key locks
each 3 keys (190 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



HIGH SECURITY SAFE EW V

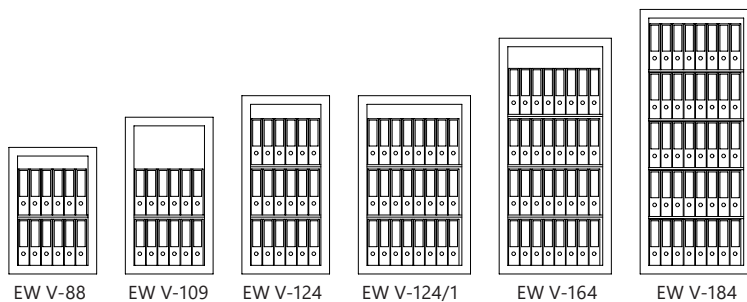

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width*	Depth	Height	Width					
EW V-88	880	610	570	760	490	360	760	490	1	1-leaf	12	134	625
EW V-109	1090	610	570	970	490	360	970	490	1	1-leaf	15	171	745
EW V-124	1240	610	570	1120	490	360	1120	490	2	1-leaf	18	198	825
EW V-124/1	1240	780	730	1120	660	520	1120	660	2	1-leaf	24	384	1140
EW V-164	1640	780	730	1520	660	520	1520	660	3	1-leaf	32	521	1420
EW V-184	1840	780	730	1720	660	520	1720	660	4	1-leaf	38	590	1570

Fittings protrude 65 mm * Inside width: -15 mm can be used because of the shelf strip



LOCKING OPTIONS

Model	Standardverschluss	Optionale Verschlussvarianten	
	Double-bit key lock* (2 pieces)	Double lock* (Double-bit key lock, Mechanical combination lock)	Double lock* (2 electronic combination locks)**
EW V-88	■	■	■
EW V-109	■	■	■
EW V-124	■	■	■
EW V-124/1	■	■	■
EW V-164	■	■	■
EW V-184	■	■	■

* other lock combinations possible ** with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 300 mm	Left door hinge	Additional shelf	Alarm accessories for alarm system	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
EW V-88	<input type="checkbox"/>	<input type="checkbox"/>	■	■	■	■	■
EW V-109	■	<input type="checkbox"/>	■	■	■	■	■
EW V-124	■	<input type="checkbox"/>	■	■	■	■	■
EW V-124/1	■	<input type="checkbox"/>	■	■	■	■	■
EW V-164	<input type="checkbox"/>	■	■	■	■	■	■
EW V-184	<input type="checkbox"/>	■	■	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE **BM II**



Model BM2-1



SECURITY LEVEL

Class II according to EN 1143-1
certified by ECB-S



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Handle, protruding 60 mm
Mounting holes: 1 fixing hole in the floor (1 repared in the backwall)
Key strip with 5 hooks for self-assembly is included.



LOCKING

High security double-bit key lock
2 keys (120 mm)



PAINTING

Light gray, RAL 7035 and Graphite gray, RAL 7024
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



HIGH SECURITY SAFE BM II



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
BM2-0	450	450	465	350	340	305	318	334	1	1-leaf	4	36	109
BM2-1	550	550	465	450	440	305	418	434	1	1-leaf	7	60	145
BM2-2	700	550	465	600	440	305	568	434	1	1-leaf	9	81	173
BM2-3	850	550	465	750	440	305	718	434	1	1-leaf	10	101	201
BM2-4	1050	550	465	950	440	305	918	434	2	1-leaf	15	127	240
BM2-5	1200	550	465	1100	440	305	1100	434	2	1-leaf	18	148	268
BM2-6	1350	550	465	1250	440	305	1218	434	2	1-leaf	20	168	297

Fittings protrude 30 mm



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
	Double-bit key lock	Electronic combination lock	Electronic combination lock*
BM2-0	■	■	□
BM2-1	■	■	■
BM2-2	■	■	■
BM2-3	■	■	■
BM2-4	■	■	■
BM2-5	■	■	■
BM2-6	■	■	■

* with emergency key

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE **BM III**



Model BM3-1



SECURITY LEVEL

Class III according to EN 1143-1
certified by ECB-S



DESIGN

Body: Multi-walled with special reinforcement
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Handle, protruding 60 mm
Mounting holes: 1 fixing hole in the floor (1 repared in the backwall)
Key strip with 5 hooks for self-assembly is included.



LOCKING

High security double-bit key lock
2 keys (135 mm)



PAINTING

Light gray, RAL 7035 and Graphite gray, RAL 7024
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



HIGH SECURITY SAFE BM III






Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
BM3-0	450	450	465	350	340	305	318	334	1	1-leaf	4	36	177
BM3-1	550	550	465	450	440	305	418	434	1	1-leaf	7	60	239
BM3-2	700	550	465	600	440	305	568	434	1	1-leaf	9	81	287
BM3-3	850	550	465	750	440	305	718	434	1	1-leaf	10	101	335
BM3-4	1050	550	465	950	440	305	918	434	2	1-leaf	15	127	401
BM3-5	1200	550	465	1100	440	305	1100	434	2	1-leaf	18	148	450
BM3-6	1350	550	465	1250	440	305	1218	434	2	1-leaf	20	168	501

Fittings protrude 30 mm



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
	 Double-bit key lock	 Electronic combination lock	 Electronic combination lock*
BM3-0	■	■	□
BM3-1	■	■	■
BM3-2	■	■	■
BM3-3	■	■	■
BM3-4	■	■	■
BM3-5	■	■	■
BM3-6	■	■	■

* with emergency key

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE **BM IV**



Model **BM4-2**



SECURITY LEVEL

Class IV according to EN 1143-1
certified by ECB-S



FIRERATING

LFS 30 according to EN 15659



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Handle, protruding 60 mm
Mounting holes: 1 fixing hole in the floor (1 repared in the backwall)
Key strip with 5 hooks for self-assembly is included.
Prepared for EMA-installation



LOCKING

2 high security double-bit key locks
each 2 keys (135 mm)



PAINTING

Light gray, RAL 7035 and Graphite gray, RAL 7024
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement.



HIGH SECURITY SAFE BM IV



BM4-0

BM4-1

BM4-2

BM4-3

BM4-4

BM4-5

BM4-6

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
BM4-0	625	500	500	505	370	305	469	350	1	1-leaf	6	57	306
BM4-1	625	570	500	505	440	305	469	420	1	1-leaf	6	64	349
BM4-2	720	570	500	600	440	305	564	420	1	1-leaf	8	81	371
BM4-3	870	570	500	750	440	305	714	420	1	1-leaf	10	101	436
BM4-4	1070	570	500	950	440	305	914	420	2	1-leaf	13	127	523
BM4-5	1220	570	500	1100	440	305	1064	420	2	1-leaf	15	148	589
BM4-6	1370	570	500	1250	440	305	1214	420	3	1-leaf	17	168	654

Fittings protrude 30 mm



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
	2 Double-bit key locks	Double lock* (Mechanical combination lock+key lock)	Doppelverschluss* (2 Electronic ombination locks**)
BM4-0	■	■	□
BM4-1	■	■	■
BM4-2	■	■	■
BM4-3	■	■	■
BM4-4	■	■	■
BM4-5	■	■	■
BM4-6	■	■	■

*other lock combinations possible ** with emergency key

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE **BM V**



Model BM5-2



SECURITY LEVEL

Class **V** according to EN 1143-1
certified by **ECB-S**



FIRERATING

LFS 30 according to EN 15659



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Handle, protruding 60 mm
Mounting holes: 1 fixing hole in the floor (1 repared in the backwall)
Key strip with 5 hooks for self-assembly is included.
Prepared for EMA-installation



LOCKING

2 high security double-bit key locks
each 2 keys (135 mm)



PAINTING

Light gray, RAL 7035 and Graphite gray, RAL 7024



INSURABLE

Individual agreement.



HIGH SECURITY SAFE BM V



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
BM5-0	660	536	525	503	370	305	469	350	1	1-flügelig	6	57	373
BM5-1	660	606	525	503	440	305	469	420	1	1-flügelig	6	64	406
BM5-2	756	606	525	600	440	305	564	420	1	1-flügelig	8	81	455
BM5-3	906	606	525	750	440	305	714	420	1	1-flügelig	10	101	531
BM5-4	1106	606	525	950	440	305	914	420	2	1-flügelig	13	127	633
BM5-5	1256	606	525	1100	440	305	1064	420	2	1-flügelig	15	148	709
BM5-6	1406	606	525	1250	440	305	1214	420	3	1-flügelig	17	168	785

Fittings protrude 30 mm



VERSCHLUSSOPTIONEN

Model	Standardlocking	Optional locking systems	
	2 Double-bit key locks	Double lock* (Mechanical combination lock+key lock)	Doppelverschluss* (2 Electronic ombination locks**)
BM5-0	■	■	□
BM5-1	■	■	■
BM5-2	■	■	■
BM5-3	■	■	■
BM5-4	■	■	■
BM5-5	■	■	■
BM5-6	■	■	■

*other lock combinations possible ** with emergency key

As of 12/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES



**MÜLLER
SAFE**

HIGH SECURITY SAFE **BM VI**



SECURITY LEVEL

Class VI according to EN 1143-1
certified by ECB-S



FIRERATING

LFS 30 according to EN 15659



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Handle, protruding 60 mm
Mounting holes: 1 fixing hole in the floor (1 repaired in the backwall)
Key strip with 5 hooks for self-assembly is included.
Prepared for EMA-installation



LOCKING

2 high security double-bit key locks
each 2 keys



PAINTING

Light gray, RAL 7035 and Graphite gray, RAL 7024



INSURABLE

Individual agreement.



HIGH SECURITY SAFES

HIGH SECURITY SAFE BM VI



sample pictures

Model	External dim. in mm			Internal dim. in mm			Door light		Door 1 / 2-leaf	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width			
BM 6-0	790	660	620	550	410	305	544	386	1-leaf	69	740
BM 6-1	1096	756	620	856	506	305	850	482	1-leaf	132	1090
BM 6-2	1296	756	620	1056	506	305	1050	482	1-leaf	163	1270
BM 6-3	1596	926	660	1356	676	425	1350	652	1-leaf	316	1870

Fittings protrude 30 mm



VERSCHLUSSOPTIONEN

Model	Standardlocking	Optional locking systems	
	2 Double-bit key locks	Double lock* (Mechanical combination lock+key lock)	Doppelverschluss* (2 Electronic combination locks)
BM 6-0	■	■	■
BM 6-1	■	■	■
BM 6-2	■	■	■
BM 6-3	■	■	■

*other lock combinations possible

As of 12/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

HIGH SECURITY SAFE **BM VII**



SECURITY LEVEL

Class VII according to EN 1143-1
certified by ECB-S



FIRERATING

LFS 30 according to EN 15659



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Handle, protruding 60 mm
Mounting holes: 1 fixing hole in the floor (1 prepared in the backwall)
Key strip with 5 hooks for self-assembly is included.
Prepared for EMA-installation



LOCKING

2 high security double-bit key locks
each 2 keys



PAINTING

Light gray, RAL 7035 and Graphite gray, RAL 7024



INSURABLE

Individual agreement.



HIGH SECURITY SAFE **BM VII**



sample pictures

Model	External dim. in mm			Internal dim. in mm			Door light		Door 1 / 2-leaf	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width			
BM 7-0	790	750	620	550	500	305	514	436	1-leaf	84	710
BM 7-1	996	750	620	756	500	305	720	436	1-leaf	115	860
BM 7-2	1296	750	620	1056	500	305	1020	436	1-leaf	161	1090
BM 7-3	1590	850	740	1350	600	425	1314	536	1-leaf	344	1610
BM 7-4	1940	950	740	1700	700	425	1664	636	1-leaf	506	2090
BM 7-5	1140	750	715	900	500	400	864	436	1-leaf	180	1070
BM 7-6	1440	750	715	1200	500	400	1164	436	1-leaf	240	1310
BM 7-7	1740	750	715	1500	500	400	1464	436	1-leaf	300	1550

Fittings protrude 30 mm



VERSCHLUSSOPTIONEN

Model	Standardlocking	Optional locking systems	
	2 Double-bit key locks	Double lock* (Mechanical combination lock+key lock)	Doppelverschluss* (2 Electronic combination locks**)
BM 7-0	■	■	■
BM 7-1	■	■	■
BM 7-2	■	■	■
BM 7-3	■	■	■
BM 7-4	■	■	■
BM 7-5	■	■	■
BM 7-6	■	■	■
BM 7-7	■	■	■

*other lock combinations possible ** with emergency key

As of 12/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



HIGH SECURITY SAFES

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de





MÜLLER
SAFE



HIGH SECURITY SAFES

STRONGROOM DOOR **AV I**



Model AV1-20E



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB-S



DESIGN

Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035
(special paint according to RAL colors for an extra charge)



INSURABLE

Individual agreement



STRONGROOM DOOR AV I



Model	External dim. in mm		Wall opening in mm		Door light in mm		Weight (Kg)
	Height	Width	Height	Width	Height	Width	
AV I-18B	1790	860	1800	880	1695	760	260
AV I-20B	1990	960	2000	980	1895	860	290
AV I-22B	2190	960	2200	980	2095	860	310
AV I-18E	1820	920	1800	880	1695	760	260
AV I-20E	2020	1020	2000	980	1895	860	290
AV I-22E	2220	1020	2200	980	2095	860	310

B = block frame, E = corner frame

Fittings protrude 65 mm

The corner frame is standard on all AV doors.

The frame depth (= wall thickness) is 240 mm as standard. Special dimensions are possible. For wall thicknesses less than 180 mm, fastening by screwing through the frame bushes is not recommended.



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
AV I-18B	■	■	■	■	■
AV I-20B	■	■	■	■	■
AV I-22B	■	■	■	■	■
AV I-18E	■	■	■	■	■
AV I-20E	■	■	■	■	■
AV I-22E	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Day-door	Electric emergency opening from the inside with ELO Basic (only possible if ELO Basic equipped)	Inner blockage system	Left door hinge
AV I-18B	■	■	■	■
AV I-20B	■	■	■	■
AV I-22B	■	■	■	■
AV I-18E	■	■	■	■
AV I-20E	■	■	■	■
AV I-22E	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



STRONGROOM DOORS

STRONGROOM DOOR AT I



Model AT1-20B



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB-S



DESIGN

Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/ fitting: Protruding 65 mm



LOCKING

High security double-bit key lock
2 keys (150 mm)



PAINTING

Light gray, RAL 7035
(special paint according to RAL colors for an extra charge)



INSURABLE

Individual agreement



STRONGROOM DOOR AT I



Model	External dim. in mm		Wall opening in mm		Door light in mm		Weight (Kg)
	Height	Width	Height	Width	Height	Width	
AT I-18B	1790	860	1800	880	1660	690	210
AT I-20B	1990	960	2000	980	1860	790	230
AT I-22B	2190	960	2200	980	2060	790	240
AT I-18E	1820	920	1800	880	1660	690	210
AT I-20E	2020	1020	2000	980	1860	790	230
AT I-22E	2220	1020	2200	980	2060	790	240

B = block frame, E = corner frame

Fittings protrude 65 mm

The corner frame is standard on all AT (i) doors.

The frame depth (= wall thickness) is 240 mm as standard. Special dimensions are possible. For wall thicknesses less than 180 mm, fastening by screwing through the frame bushes is not recommended.



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
AT I-18B	■	■	■	■	■
AT I-20B	■	■	■	■	■
AT I-22B	■	■	■	■	■
AT I-18E	■	■	■	■	■
AT I-20E	■	■	■	■	■
AT I-22E	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Day-door	Electric emergency opening from the inside with ELO Basic (only possible if ELO Basic equipped)	Inner blockage system	Left door hinge
AT I-18B	■	■	■	■
AT I-20B	■	■	■	■
AT I-22B	■	■	■	■
AT I-18E	■	■	■	■
AT I-20E	■	■	■	■
AT I-22E	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



STRONGROOM DOORS

STRONGROOM DOOR AT II



Model AT2-20E



SECURITY LEVEL

Class II according to EN 1143-1
certified by ECB-S



DESIGN

Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm



LOCKING

High security double-bit key lock
2 keys (150 mm)



PAINTING

Light gray, RAL 7035
(special paint according to RAL colors for an extra charge)



INSURABLE

Individual agreement



STRONGROOM DOOR AT II



Model	External dim. in mm		Wall opening in mm		Door light in mm		Weight (Kg)
	Height	Width	Height	Width	Height	Width	
AT II-18B	1790	860	1800	880	1660	690	440
AT II-20B	1990	960	2000	980	1860	790	540
AT II-22B	2190	960	2200	980	2060	790	595
AT II-18E	1820	920	1800	880	1660	690	440
AT II-20E	2020	1020	2000	980	1860	790	540
AT II-22E	2220	1020	2200	980	2060	790	595

B = block frame, E = corner frame

Fittings protrude 65 mm

The corner frame is standard on all AT (i) doors.

The frame depth (= wall thickness) is 240 mm as standard. Special dimensions are possible. For wall thicknesses less than 180 mm, fastening by screwing through the frame bushes is not recommended.



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
AT II-18B	■	■	■	■	■
AT II-20B	■	■	■	■	■
AT II-22B	■	■	■	■	■
AT II-18E	■	■	■	■	■
AT II-20E	■	■	■	■	■
AT II-22E	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Day-door	Electric emergency opening from the inside with ELO Basic (only possible if ELO Basic equipped)	Inner blockage system	Left door hinge
AT II-18B	■	■	■	■
AT II-20B	■	■	■	■
AT II-22B	■	■	■	■
AT II-18E	■	■	■	■
AT II-20E	■	■	■	■
AT II-22E	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



STRONGROOM DOORS



**MÜLLER
SAFE**

STRONGROOM DOOR **AT III**



Model AT3-18B



SECURITY LEVEL

Class III according to EN 1143-1
certified by ECB-S



DESIGN

Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm



LOCKING

High security double-bit key lock
2 keys (190 mm)



PAINTING

Light gray, RAL 7035
(special paint according to RAL colors for an extra charge)



INSURABLE

Individual agreement



STRONGROOM DOORS

STRONGROOM DOOR AT III



Model	External dim. in mm		Wall opening in mm		Door light in mm		Weight (Kg)
	Height	Width	Height	Width	Height	Width	
AT III-18B	1790	860	1800	880	1660	690	706
AT III-20B	1990	960	2000	980	1860	790	790
AT III-22B	2190	960	2200	980	2060	790	880
AT III-18E	1820	920	1800	880	1660	690	706
AT III-20E	2020	1020	2000	980	1860	790	790
AT III-22E	2220	1020	2200	980	2060	790	880

B = block frame, E = corner frame

Fittings protrude 65 mm

The corner frame is standard on all AT (i) doors.

The frame depth (= wall thickness) is 240 mm as standard. Special dimensions are possible. For wall thicknesses less than 180 mm, fastening by screwing through the frame bushes is not recommended.



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
AT III-18B	■	■	■	■	■
AT III-20B	■	■	■	■	■
AT III-22B	■	■	■	■	■
AT III-18E	■	■	■	■	■
AT III-20E	■	■	■	■	■
AT III-22E	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Day-door	Electric emergency opening from the inside with ELO Basic (only possible if ELO Basic equipped)	Inner blockage system	Left door hinge
AT III-18B	■	■	■	■
AT III-20B	■	■	■	■
AT III-22B	■	■	■	■
AT III-18E	■	■	■	■
AT III-20E	■	■	■	■
AT III-22E	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery - Technical changes reserved.



STRONGROOM DOORS

STRONGROOM DOOR AT VI



SECURITY LEVEL

Class VI according to EN 1143-1
certified by ECB-S



DESIGN

Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm



LOCKING

Two high security double-bit key locks
each 2 keys (170 mm)



PAINTING

Light gray, RAL 7035
(special paint according to RAL colors for an extra charge)



INSURABLE

Individual agreement



STRONGROOM DOOR AT VI



Model	External dim. in mm		Wall opening in mm		Door light in mm		Weight (Kg)
	Height	Width	Height	Width	Height	Width	
AT VI-18B	1823	992			1700	800	815
AT VI-20B	2123	1092			2000	900	1000
AT VI-22B	2123	1192			2000	1000	1070


B = block frame

Fittings protrude 65 mm

The frame depth (= wall thickness) is 300 mm as standard. Special dimensions are possible. For wall thicknesses less than 180 mm, fastening by screwing through the frame bushes is not recommended.






LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
			
	Double-bit key lock (2 pieces)	Double lock (2 Mechanical combination locks)	Double lock (2 Electronic combination locks)
AT VI-18B	■	■	■
AT VI-20B	■	■	■
AT VI-22B	■	■	■



ACCESSORIES FOR EXTRA CHARGE

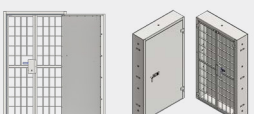Model	Day-door	Inner blockage system	Left door hinge
			
AT VI-18B	■	■	■
AT VI-20B	■	■	■
AT VI-22B	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



STRONGROOM DOORS



**MÜLLER
SAFE**

STRONGROOM DOOR ATi I



Model ATiI-20E



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB-S



DESIGN

Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Door opening inwards



LOCKING

High security double-bit key lock
2 keys (150 mm)



PAINTING

Light gray, RAL 7035
(special paint according to RAL colors for an extra charge)



INSURABLE

Individual agreement



STRONGROOM DOORS

STRONGROOM DOOR ATi I



Model	External dim. in mm		Wall opening in mm		Door light in mm		Weight (Kg)
	Height	Width	Height	Width	Height	Width	
ATi I-18B	1790	860	1800	880	1650	670	210
ATi I-20B	1990	960	2000	980	1850	770	230
ATi I-22B	2190	960	2200	980	2050	770	240
ATi I-18E	1820	920	1800	880	1650	670	210
ATi I-20E	2020	1020	2000	980	1850	770	230
ATi I-22E	2220	1020	2200	980	2050	770	240

B = block frame, E = corner frame

Fittings protrude 65 mm

The corner frame is standard on all AT (i) doors.

The frame depth (= wall thickness) is 240 mm as standard. Special dimensions are possible. For wall thicknesses less than 180 mm, fastening by screwing through the frame bushes is not recommended.



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
ATi I-18B	■	■	■	■	■
ATi I-20B	■	■	■	■	■
ATi I-22B	■	■	■	■	■
ATi I-18E	■	■	■	■	■
ATi I-20E	■	■	■	■	■
ATi I-22E	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Day-door	Electric emergency opening from the inside with ELO Basic (only possible if ELO Basic equipped)	Inner blockage system	Left door hinge
ATi I-18B	■	■	■	■
ATi I-20B	■	■	■	■
ATi I-22B	■	■	■	■
ATi I-18E	■	■	■	■
ATi I-20E	■	■	■	■
ATi I-22E	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



STRONGROOM DOORS

STRONGROOM DOOR **ATi II**



Model ATi2-22E



SECURITY LEVEL

Class II according to EN 1143-1
certified by ECB-S



DESIGN

Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Door opening inwards



LOCKING

High security double-bit key lock
2 keys (150 mm)



PAINTING

Light gray, RAL 7035
(special paint according to RAL colors for an extra charge)



INSURABLE

Individual agreement



STRONGROOM DOOR ATi II



Model	External dim. in mm		Wall opening in mm		Door light in mm		Weight (Kg)
	Height	Width	Height	Width	Height	Width	
ATi II-18B	1790	860	1800	880	1650	670	440
ATi II-20B	1990	960	2000	980	1850	770	540
ATi II-22B	2190	960	2200	980	2050	770	595
ATi II-18E	1820	920	1800	880	1650	670	440
ATi II-20E	2020	1020	2000	980	1850	770	540
ATi II-22E	2220	1020	2200	980	2050	770	595

B = block frame, E = corner frame

Fittings protrude 65 mm

The corner frame is standard on all AT (i) doors.

The frame depth (= wall thickness) is 240 mm as standard. Special dimensions are possible. For wall thicknesses less than 180 mm, fastening by screwing through the frame bushes is not recommended.



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronical combination lock	Electronical combination lock*	Doppelverschluss** (2 Double-bit key locks)
ATi II-18B	■	■	■	■	■
ATi II-20B	■	■	■	■	■
ATi II-22B	■	■	■	■	■
ATi II-18E	■	■	■	■	■
ATi II-20E	■	■	■	■	■
ATi II-22E	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Day-door	Electric emergency opening from the inside with ELO Basic (only possible if ELO Basic equipped)	Inner blockage system	Left door hinge
ATi II-18B	■	■	■	■
ATi II-20B	■	■	■	■
ATi II-22B	■	■	■	■
ATi II-18E	■	■	■	■
ATi II-20E	■	■	■	■
ATi II-22E	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



STRONGROOM DOORS

STRONGROOM DOOR ATi III



Model ATi3-18E



SECURITY LEVEL

Class III according to EN 1143-1
certified by ECB-S



DESIGN

Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Door opening inwards



LOCKING

High security double-bit key lock
2 keys (190 mm)



PAINTING

Light gray, RAL 7035
(special paint according to RAL colors for an extra charge)



INSURABLE

Individual agreement



STRONGROOM DOOR ATi III



Model	External dim. in mm		Wall opening in mm		Door light in mm		Weight (Kg)
	Height	Width	Height	Width	Height	Width	
ATi III-18B	1790	860	1800	880	1685	650	706
ATi III-20B	1990	960	2000	980	1885	750	790
ATi III-22B	2190	960	2200	980	2085	750	880
ATi III-18E	1820	920	1800	880	1685	650	706
ATi III-20E	2020	1020	2000	980	1885	750	790
ATi III-22E	2220	1020	2200	980	2085	750	880

B = block frame, E = corner frame

Fittings protrude 65 mm

The corner frame is standard on all AT (i) doors.

The frame depth (= wall thickness) is 240 mm as standard. Special dimensions are possible. For wall thicknesses less than 180 mm, fastening by screwing through the frame bushes is not recommended.



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
ATi III-18B	■	■	■	■	■
ATi III-20B	■	■	■	■	■
ATi III-22B	■	■	■	■	■
ATi III-18E	■	■	■	■	■
ATi III-20E	■	■	■	■	■
ATi III-22E	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Day-door	Electric emergency opening from the inside with ELO Basic (only possible if ELO Basic equipped)	Inner blockage system	Left door hinge
ATi III-18B	■	■	■	■
ATi III-20B	■	■	■	■
ATi III-22B	■	■	■	■
ATi III-18E	■	■	■	■
ATi III-20E	■	■	■	■
ATi III-22E	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery - Technical changes reserved.



STRONGROOM DOORS

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de





MÜLLER
SAFE



STRONGROOMS

STRONGROOMS



STR I



SECURITY LEVEL
Class I according to EN 1143-1
certified by ECB-S

DESIGN
Panel thickness: Double-walled, 43 mm
Panel width: 500 mm
Hinges: External
Door opening angle: 180°
Handle/fitting: protrudes approx. 65 mm



STR III



SECURITY LEVEL
Class III according to EN 1143-1
certified by VdS

Bullet resistant FB7-NS according
to DIN EN 1522 (optional)

DESIGN
Panel thickness: Multi-walled, 70 mm
Panel width: 500 mm
Hinges: External
Door opening angle: 180°
Handle/fitting: protrudes approx. 65 mm



STR V



SECURITY LEVEL
Class V according to EN 1143-1
certified by ECB-S

Bullet resistant FB7-NS according
to DIN EN 1522 (optional)

DESIGN
Panel thickness: Multi-walled, 70 mm
Panel width: 500 mm
Hinges: External
Door opening angle: 180°
Handle/fitting: protrudes approx. 65 mm

Strongrooms are available in bolted and welded designs. Each panel is individually marked, which enables quick and un-complicated assembly by a specialist company.



STRONGROOMS

GENERAL CONSTRUCTION PRINCIPLE



Height of Panels

individually according to customer requirements



Bolted version

easy assembly and disassembly of panels

* Optionally possible in a welded version



Modularity of panels

possibility of ordering additional elements*

* Option is only in bolted version available



STRONGROOMS

STRONGROOM STR I



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB-S

Application areas:

- Legally compliant storage of weapons, weapon parts and ammunition
- Safe storage of valuables, documents, cash, etc. in the office, trade, production and administration
- to secure business and private premises, can also be used as wall reinforcement for individual walls (without certification)



DESIGN

Panel thickness: Double-walled (43 mm thick)

Panel width: 500 mm (Usable width of the panel 250-750 mm)

Available in bolted and welded design.



PAINTING

Light gray, RAL 7035

(special painting according to RAL colors for an extra charge)

Powder coated



INSURABLE

Individual agreement

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



STRONGROOMS

STRONGROOMDOOR STR I



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB-S



DESIGN

Door: Multi-walled, 84 mm thick
Frame: Double-walled, 40 mm thick
Locking: 3-sided locking; 2-sided with boltwork, the hinge side additionally secured by a rear grip profile
Hinges: External
Door opening angle: 180°
Fitting / handle: hanging handle protruding 65 mm (plus external depth)
Mounting holes: 9 pieces, 4 on each side and 1 on the top



LOCKING

Double bit high security lock VdS class A with 2 keys (length 120 mm).
Other lock options are possible.



PAINTING

Light gray, RAL 7035
(special paint according to RAL colors for an extra charge)



INSURABLE

Individual agreement

Model	External dimensions in mm			Door light in mm		Weight (kg)
	Height	Width	Depth	Height	Width	
STD1-0	1700	900	240	1650	826	140
STD1-1	1800	900	240	1750	826	146
STD1-2	2000	1000	240	1950	926	172
STD1-3	2000	1200	240	1950	1146	220

Special designs possible on request.

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



STRONGROOMS

STRONGROOM STR III



Panel
outside view



Panel
Inside view *
(*shows bolted
version)



SECURITY LEVEL

Class III according to EN 1143-1
certified by VdS
Bullet-resistant FB7-NS according to DIN EN 1522 (optional)

Application areas:

- for storing medication
- Storage of weapons, weapon parts and ammunition
- Safe storage of valuables, documents, cash, etc. in the office, trade, production and administration
- Archive
- to secure business and private premises, can also be used as wall reinforcement for individual walls (without certification)



DESIGN

Panel thickness: Multi-walled (70 mm thick)
Panel width: 500 mm (Usable width of the panel 250-750 mm)
Execution: Panels from the outside - 85-90% concrete, rest steel;
Panels from the inside - 100% steel. Steel elements only primed.

Available in bolted and welded design.



PAINTING

Primed (painting of the inside of the panels on request)



INSURABLE

Individual agreement

As of 01/2022 - decorative material not included in the scope of delivery - Technical changes reserved.



STRONGROOMS

STRONGROOMDOOR STR III



SECURITY LEVEL

Class III according to EN 1143-1 certified by VdS



DESIGN

Door: Single-walled, 130 mm thick, filled with special concrete
Frame: Double-walled, 60 mm thick, filled with special concrete
Locking: 3-sided locking; 2-sided with boltwork, the hinge side additionally secured by a rear grip profile
Hinges: External
Door opening angle: 180°
Fitting / handle: Hanging handle protrudes 65 mm (plus external depth)
Mounting holes: 10 pieces, 4 on each side and 2 on the top



LOCKING

Double bit - high security lock VdS class B with 2 keys (length 170 mm). Other lock options are possible.



PAINTING

Light gray, RAL 7035 (special paint according to RAL colors for an extra charge)



VERSICHERBAR

Individual agreement

Model	External dimensions in mm			Door light in mm		Weight (kg)
	Height	Width	Depth	Height	Width	
STD3-0	1700	900	300	1594	742	607
STD3-1	1800	900	300	1694	744	638
STD3-2	2000	1000	300	1894	842	751

Special designs possible on request.

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



STRONGROOMS

STRONGROOM STR V



Panel
outside view



Panel
inside view *
(*shows bolted
version)



SECURITY LEVEL

Class V according to EN 1143-1
certified by ECB-S
Bullet-resistant FB7-NS according to DIN EN 1522 (optional)

Application areas:

- Jewelry stores
- Storage of weapons, weapon parts and ammunition
- Safe storage of valuables, documents, cash, etc. in the office, trade, production and administration
- archive
- to secure business and private premises, can also be used as wall reinforcement for individual walls (without certification)



DESIGN

Panel thickness: multi-walled (70 mm thick)
Panel width: 500 mm (usable width of the panel 250-750 mm)
Execution: panels from the outside - 85-90% concrete, the rest of metal;
Panels from the inside - 100% metal. Metal elements only primed.

Available in bolted and welded design.



PAINTING

Primed (painting of the inside of the panels on request)



INSURABLE

Individual agreement

As of 01/2022 - decorative material not included in the scope of delivery - Technical changes reserved.



STRONGROOMS

STRONGROOMDOOR STR V



SECURITY LEVEL

Class V according to EN 1143-1 certified by ECB-S



DESIGN

Door: Multi-walled, 145 mm thick, filled with special concrete
Frame: Double-walled, 78 mm thick, filled with special concrete
Locking: 3-sided locking; 2-sided with boltwork, the hinge side additionally secured by a rear grip profile
Hinges: External
Door opening angle: 180°
Fitting / handle: hanging handle protruding 65 mm (plus external depth)
Mounting holes: 10 pieces, 4 on each side and 2 on the top



LOCKING

Double-bit high security lock VdS class B with 1 rigid and 1 articulated key (length 170 mm) and an additional mechanical ZK lock VdS class B. Other lock options possible.



PAINTING

Light gray, RAL 7035 (special paint according to RAL colors for an extra charge)



INSURABLE

Individual agreement

Model	External dimension in mm			Door light in mm		Weight (Kg)
	Höhe	Breite	Depth	Height	Width	
STD5-0	1700	900	300	1574	708	710
STD5-1	1800	900	300	1674	708	746
STD5-2	2000	1000	300	1874	808	878

Special designs possible on request.

As of 01/2022 - decorative material not included in the scope of delivery - Technical changes reserved.




STRONGROOMS


STRONGROOMS

OPTIONS

- EMERGENCY EXIT IN THE CEILING OF THE STRONGROOM
- PREPARATION FOR VENTILATION / VENTILATION HOLES
- STEEL SHEATHING OF THE PANELS OUTSIDE
- PREPARATION FOR THE INSTALLATION OF ALARM SYSTEM COMPONENTS
- PREPARATION FOR LIGHTING

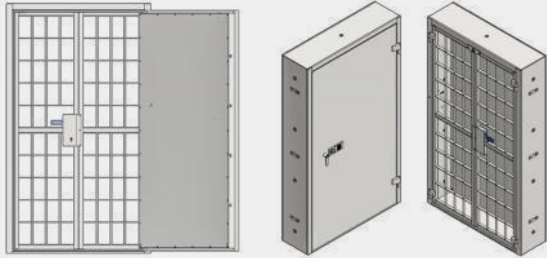

DAY-DOOR

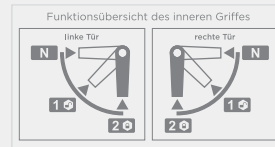


INNER BLOCKAGE SYSTEM



ELECTRONIC LOCKS



OTHER HANDLES THAN STANDARD

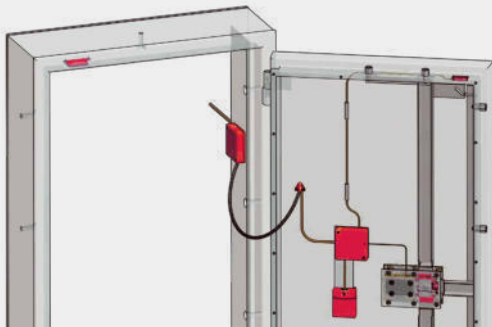

ALARM SYSTEM ELEMENTS /
ALARM SYSTEM




Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de

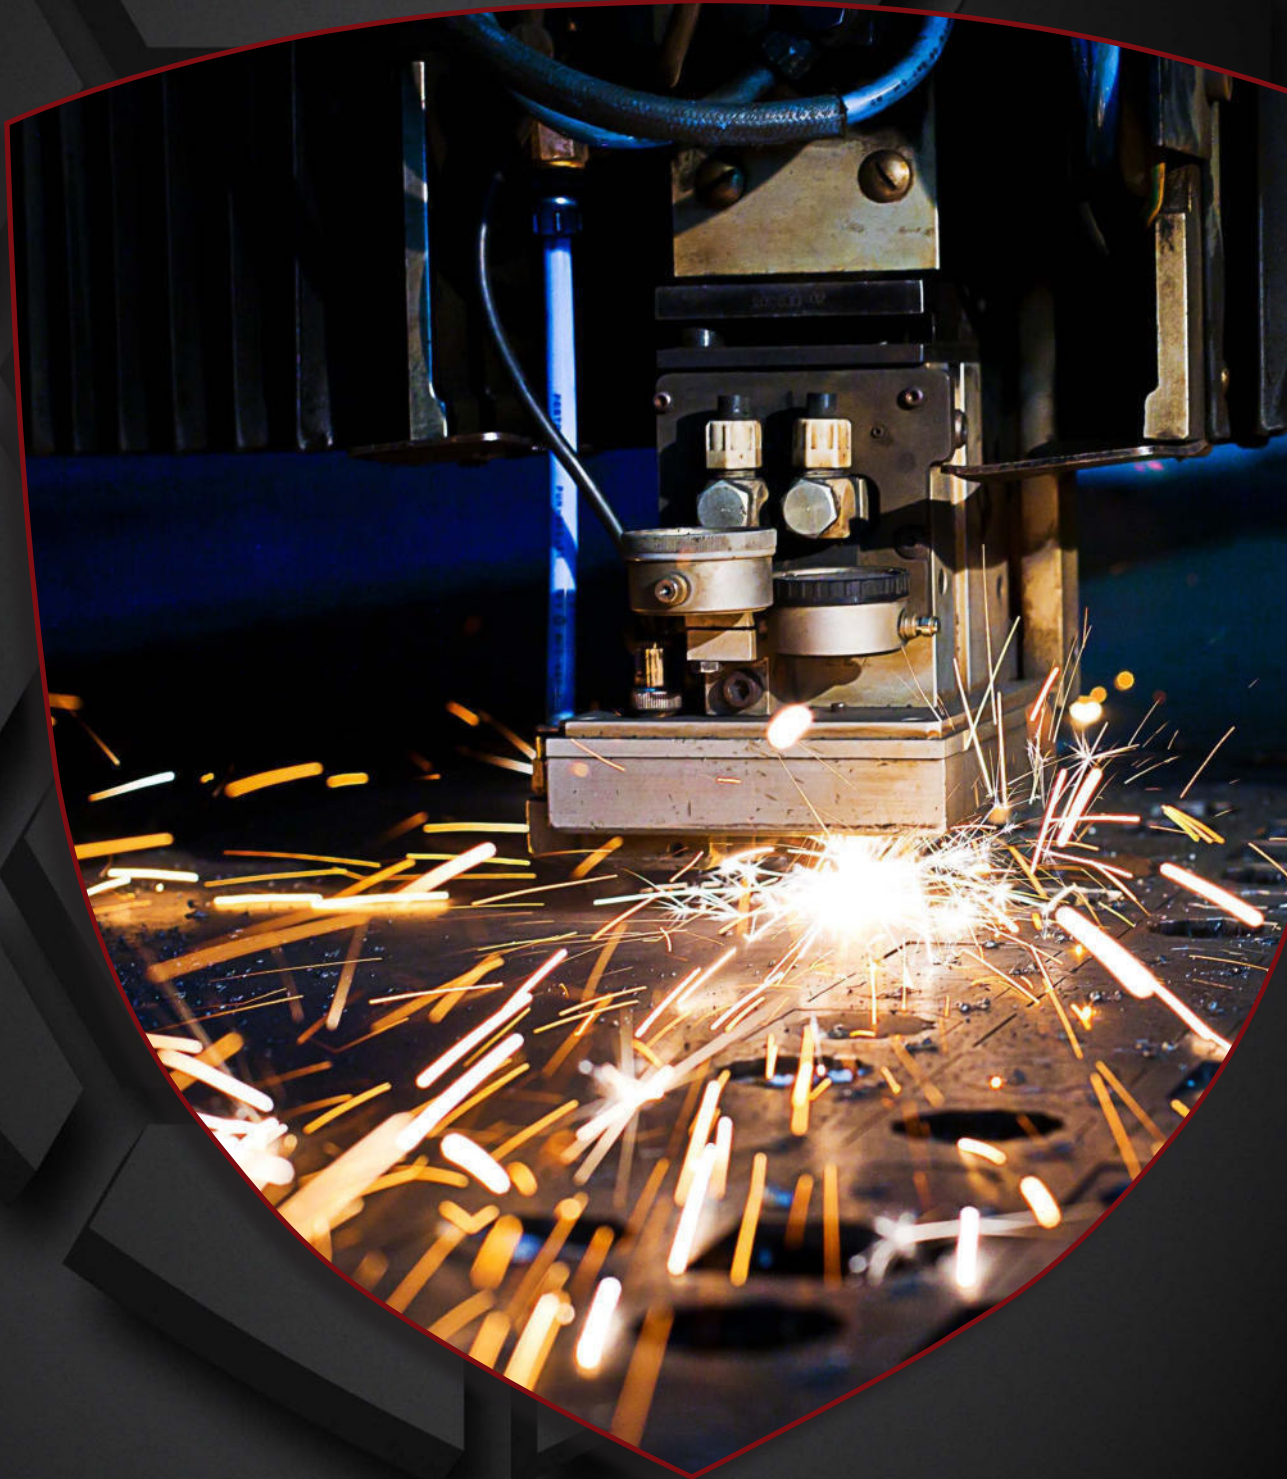



MÜLLER
SAFE



FIREPROOF SAFES FOR DOCUMENTS

FIRE PROTECTION CASSETTE **KFD**



SECURITY LEVEL

Housing made of special plastic
Robust against access



FIRE RATING

The test was conducted in accordance with the standards of the Underwriters Laboratories (UL 72), the leading institute for tests of this kind in America. The models were exposed there for half an hour to a temperature of 843 ° Celsius. After that, the documents stored in it were still legible.



DESIGN

These fireproofing boxes offer low-cost fire safety for all the important papers and valuable items that you want to protect.



LOCKING

Cylinder lock
2 keys (40 mm)



PAINTING

Black



INSURABLE

Individual agreement



FIRE PROTECTION CASSETTE **KFD**



Model	External dim. in mm			Internal dim. in mm			Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	
KFD 12	155	362	284	89	305	191	6
KFD 15	168	391	363	117	325	216	9
KFD 35	359	421	351	295	305	206	20



LOCKING OPTIONS

Model	Standardlocking
Model	Cylinder lock
KFD 12	■
KFD 15	■
KFD 35	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FIREPROOF SAFES FOR DOCUMENTS

FIREPROOF SAFE EM



Model EM 031



SECURITY LEVEL

Housing made of steel
Robust against access



FIRE RATING

NT Fire 017-60 Paper, 1 hour
One hour heat test at up to 1100 ° Celsius according to NT FIRE 017-60 Paper



DESIGN

Body: Double-walled
Door: Double-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting hole: 1 fixing hole in the floor



LOCKING

Electronic combination lock with two 6-digit user codes



PAINTING

Gray white, RAL 9002



INSURABLE

Individual agreement



FIREPROOF SAFE EM



EM 015



EM 020



EM 031

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width				
EM 015	296	390	320	215	310	215	215	310	1	1-leaf	14	27
EM 020	344	480	388	220	355	260	220	355	1	1-leaf	20	49
EM 031*	520	410	445	415	305	320	415	305	1	1-leaf	40	60

Fittings protrude 35 mm * Drawer H = 50 mm



LOCKING OPTIONS

Standardlocking



Electronic combination lock

Model	Electronic combination lock
EM 015	■
EM 020	■
EM 031	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FIREPROOF SAFES FOR DOCUMENTS

FIREPROOF SAFE ES



Model ES 100



SECURITY LEVEL

Housing made of steel
Robust against access



FIRE RATING

NT Fire 017-120 Paper, 2 hours und Underwriters Laboratories (UL 72),
2 hours (except model ES 700; fire protection: 1 hour)



DESIGN

All cabinets are equipped with a drawer, model ES-700 with 2 drawers next to
each other (H = 140 mm)

Body: Double-walled

Door: Multi-walled

Hinges: External

Door opening angle: 180°

Handle/fitting: Protruding 40 mm

Mounting hole: 1 fixing hole in the floor



LOCKING

Electronic combination lock with two 6-digit user codes, plus a cylinder lock
with 2 keys (60 mm). Key cannot be removed when open.



PAINTING

Gray white, RAL 9002



INSURABLE

Individual agreement



FIREPROOF SAFE ES



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1/2-leaf	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width				
ES 065	669	549	507	519	398	346	519	398	1	1-leaf	71	137
ES 080	791	580	507	638	416	346	638	416	1	1-leaf	92	165
ES 100	992	585	507	833	426	346	833	426	2	1-leaf	123	205
ES 150	1171	642	630	1012	483	463	1012	483	2	1-leaf	226	295
ES 400	1612	832	630	1438	673	463	1438	673	3	1-leaf	448	470
ES 700*	1710	1206	654	1536	1047	487	1536	1047	3	2-leafs	762	670

Fittings protrude 40 mm * double-leaf, 2 drawers side by side, H = 140 mm



LOCKING OPTIONS

Standardlocking



Electronic combination lock+cylinder lock

Model	Standardlocking
ES 065	■
ES 080	■
ES 100	■
ES 150	■
ES 400	■
ES 700	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FIREPROOF SAFES FOR DOCUMENTS

FIRE PROTECTION CARD CABINET **KT**



Model KT 3 V



FIRE RATING

1 hour heat test „Underwriters Laboratories“ (UL 72)

KT 4 V tested in Braunschweig
certified by ECB-S



DESIGN

Body: Double-walled
Drawers: Double-walled
Drawers with bases
Drawers are separated from each other by fire protective dividing walls in die body
Drawers on telescope rails
Available with 2,3 or 4 drawers



LOCKING

Cylinder lock
2 keys (55 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



FIRE PROTECTION CARD CABINET KT



KT 2 V

KT 3 V

KT 4 V

KT 2 H




KT 3 H

KT 4 H

Model	External dim. in mm			Internal dim. in mm			Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	
KT 2 V	759	539	802	299	387	660	195
KT 3 V	1103	539	802	299	387	660	295
KT 4 V	1448	539	802	299	387	660	381
KT 2 H	759	952	562	295	810	387	264
KT 3 H	1103	952	562	295	810	387	394
KT 4 H	1448	952	562	295	810	387	442



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
	 Cylinder lock		
KT 2 V	■		■
KT 3 V	■		■
KT 4 V	■		■
KT 2 H	■		■
KT 3 H	■		■
KT 4 H	■		■



ACCESSORIES FOR EXTRA CHARGE

Model	File box
KT 2 V	■
KT 3 V	■
KT 4 V	■
KT 2 H	■
KT 3 H	■
KT 4 H	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FIREPROOF SAFES FOR DOCUMENTS

FIREPROOF SAFE PEW



Model PEW 80



SECURITY LEVEL

Class I according to EN 1143-1
certified by VdS



FIRE RATING

S 60 P according to EN 1047-1



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor



LOCKING

High security double-bit key lock
2 keys (120 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



FIREPROOF SAFE PEW



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
PEW 37	379	589	471	278	477	329	263	454	1	1-leaf	3	44	128
PEW 48	482	589	471	381	477	329	366	454	1	1-leaf	6	60	144
PEW 61	615	589	471	514	477	329	499	454	2	1-leaf	6	81	170
PEW 80	801	589	471	700	477	329	685	454	2	1-leaf	12	110	215
PEW 113	1137	704	471	1036	592	329	1021	569	3	1-leaf	21	202	330
PEW 132	1322	704	471	1221	592	329	1206	569	3	1-leaf	21	238	365
PEW 150	1507	704	471	1406	592	329	1391	569	3	1-leaf	28	274	395
PEW 155	1550	886	545	1449	774	403	1434	751	3	1-leaf	40	452	509
PEW 170	1700	886	545	1599	774	403	1584	751	4	1-leaf	44	499	547
PEW 1881	1884	886	545	1783	774	403	1768	751	4	1-leaf	50	556	586
PEW 1882/2	1884	975	559	1783	863	393	1768	845	4	2-leafs	55	604	701
PEW 1883/2	1884	975	696	1783	863	530	1768	845	4	2-leafs	55	815	759
PEW 1884/2	1884	1128	559	1783	1016	393	1768	998	4	2-leafs	65	712	790
PEW 1885/2	1884	1128	696	1783	1016	530	1768	998	4	2-leafs	65	960	851
PEW 1886/2	1884	1282	459	1783	1170	293	1768	1152	4	2-leafs	75	611	839
PEW 1887/2	1884	1282	559	1783	1170	393	1768	1152	4	2-leafs	75	820	886
PEW 1888/2	1884	1282	696	1783	1170	530	1768	1152	4	2-leafs	75	1106	951

Fittings protrude 65 mm



LOCKING OPTIONS

Standardlocking	Optional locking systems		
Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*

Options for the entire series possible

* with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height=200 mm	Inner safe Height=250 mm	Inner safe Height=350 mm 2-leaf	Left door hinge	Additional shelf	Suspension file on telescopic rails	Shelf for hanging files	Special fixing kit for concrete floor
PEW 37	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 48	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 61	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 80	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 113	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 132	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 150	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 155	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 170	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 1881	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 1882/2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 1883/2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 1884/2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 1885/2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 1886/2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 1887/2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEW 1888/2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FIREPROOF SAFES FOR DOCUMENTS

FIREPROOF SAFE PEB



Model PEB 1802/2



SECURITY LEVEL

Class I according to EN 1143-1
certified by VdS



FIRE RATING

S 120 P according to EN 1047-1



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor (2 fixing holes in the floor, if 2-leaves)



LOCKING

High security double-bit key lock
2 keys (120 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



FIREPROOF SAFE PEB

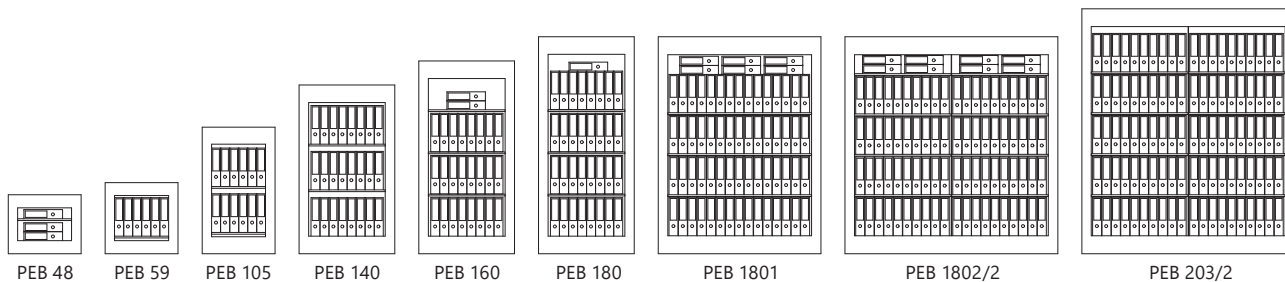


Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
PEB 48	489	605	560	273	448	358	252	418	1	1-leaf	3	43	178
PEB 59	590	605	560	374	448	358	353	418	1	1-leaf	6	60	198
PEB 105	1050	605	560	769	448	368	730	385	2	1-leaf	12	126	335
PEB 140	1400	794	560	1109	637	358	1063	557	2	1-leaf	24	252	497
PEB 160	1600	794	560	1309	637	358	1263	557	3	1-leaf	26	298	593
PEB 180	1800	794	560	1509	637	358	1463	557	3	1-leaf	33	344	728
PEB 1801	1800	1350	560	1505	1193	358	1463	1103	3	2-leaf	67	642	1025
PEB 1802/2*	1800	1766	560	1505	1609	358	1453	1519	2 x 4	2-leaf	84	866	1310
PEB 203/2*	2033	1766	560	1738	1609	358	1686	1519	2 x 4	2-leaf	94	1000	1460

Fittings protrude 65 mm *with vertical partition



LOCKING OPTIONS

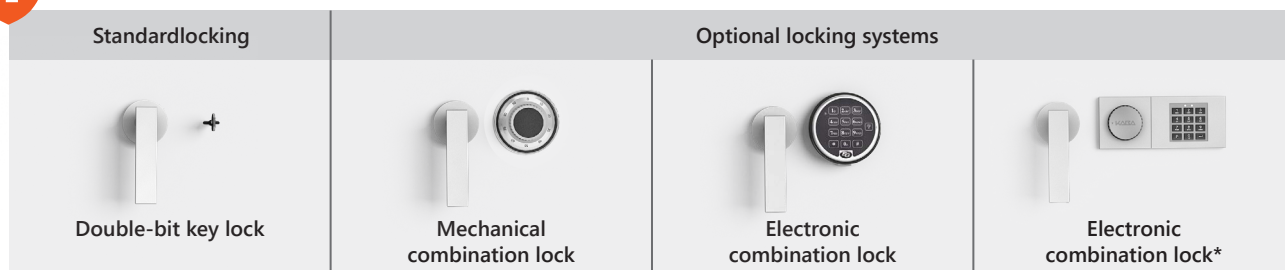

Options for the entire series possible

* with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 240 mm	Inner safe Height = 240 mm (2-leaf)	Left door hinge	Additional shelf	Suspension file on telescopic rails	Shelf for hanging files	Special fixing kit for concrete floor
PEB 48	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PEB 59	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PEB 105	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEB 140	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEB 160	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEB 180	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEB 1801	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEB 1802/2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PEB 203/2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FIREPROOF SAFES FOR DOCUMENTS

FIREPROOF SAFE PEV



Model PEV 82



SECURITY LEVEL

Class II according to EN 1143-1
certified by VdS



FIRE RATING

S 60 P according to EN 1047-1



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor



LOCKING

High security double-bit key lock
2 keys (120 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



FIREPROOF SAFE PEV

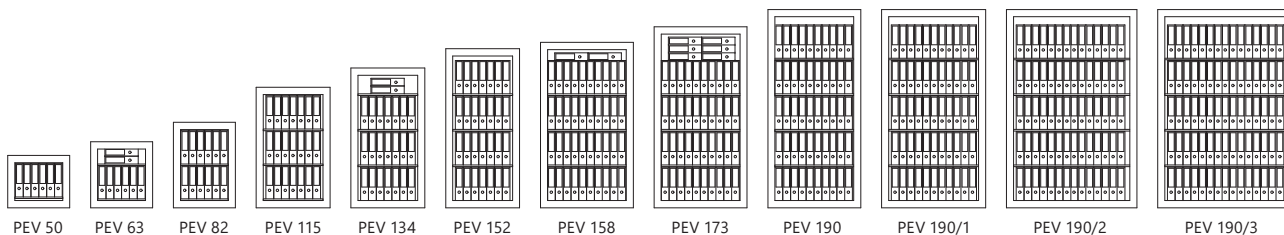

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
PEV 50	503	595	497	364	457	319	358	454	1	1-leaf	6	53	186
PEV 63	635	595	497	496	457	319	490	454	2	1-leaf	8	72	230
PEV 82	822	595	497	683	457	319	677	454	2	1-leaf	12	99	280
PEV 115	1158	710	497	1019	572	319	1013	569	3	1-leaf	21	185	420
PEV 134	1343	710	497	1204	572	319	1198	569	3	1-leaf	23	219	451
PEV 152	1528	710	497	1389	572	319	1383	569	3	1-leaf	28	253	520
PEV 158	1589	892	571	1450	756	393	1444	751	3	1-leaf	42	430	655
PEV 173	1739	892	571	1600	756	393	1594	751	4	1-leaf	40	470	707
PEV 190	1905	892	571	1766	756	393	1760	751	4	1-leaf	50	525	765
PEV 190/1	1905	999	580	1766	863	392	1760	858	4	2-leafs	55	597	935
PEV 190/2	1905	1252	580	1766	1116	392	1760	1111	4	2-leafs	70	772	1063
PEV 190/3	1905	1288	580	1766	1152	392	1760	1147	4	2-leafs	75	797	1082

Fittings protrude 65 mm



LOCKING OPTIONS

Standardlocking	Optional locking systems		
Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*

Options for the entire series possible

* with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height= 200 mm	Inner safe Height = 200 mm (2-leafs)	Left door hinge	Additional shelf	Suspension file on telescopic rails	Shelf for hanging files	Special fixing kit for concrete floor
PEV 50	■	□	■	■	□	□	■
PEV 63	■	□	■	■	□	□	■
PEV 82	■	□	■	■	■	■	■
PEV 115	■	□	■	■	■	■	■
PEV 134	■	□	■	■	■	■	■
PEV 152	■	□	■	■	■	■	■
PEV 158	■	□	■	■	■	■	■
PEV 173	■	□	■	■	■	■	■
PEV 190	■	□	■	■	■	■	■
PEV 190/1	□	■	■	■	■	■	■
PEV 190/2	□	■	■	■	■	■	■
PEV 190/3	□	■	■	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FIREPROOF SAFES FOR DOCUMENTS

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de





MÜLLER
SAFE



FIREPROOF SAFES FOR DATA CARRIES

FIREPROOF SAFE PG



Model PG 637



SECURITY LEVEL

Class I according to EN 1143-1
certified by VdS



FIRE RATING

S 60 DIS according to EN 1047-1



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 2 fixing holes in the floor



LOCKING

High security double-bit key lock
2 keys (120 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



FIREPROOF SAFE PG



PG 636





PG 637

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width				
PG 636	635	563	630	400	368	397	400	368	1	1-leaf	58	198
PG 637	635	563	755	400	368	522	400	368	1	1-leaf	76	223

Fittings protrude 65 mm








LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
		 Double-bit key lock	 Electronic combination lock
PG 636	■	■	■
PG 637	■	■	■

* with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Left door hinge	Additional shelf	Suspension file on telescopic rails	Shelf for hanging files	Special fixing kit for concrete floor
					
PG 636	■	■	■	■	■
PG 637	■	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FIREPROOF SAFES FOR DATA CARRIERS

FIREPROOF SAFE DIK



Model DIK 145



SECURITY LEVEL

Class I according to EN 1143-1
certified by IMP



FIRE RATING

S 120 DIS according to EN 1047-1



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 2 fixing holes in the floor



LOCKING

High security double-bit key lock
2 keys (145 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



FIREPROOF SAFE DIK



DIK 1147

DIK 1148

DIK 130




DIK 145

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width				
DIK 1147	1143	714	662	887	478	388	887	478	2	1-leaf	169	433
DIK 1148	1143	800	730	887	564	456	887	564	2	1-leaf	234	501
DIK 130	1300	800	730	1044	564	456	1044	564	3	1-leaf	275	560
DIK 145	1456	886	798	1200	650	524	1200	650	4	1-leaf	418	707

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
	 Double-bit key lock	 Electronic combination lock	 Electronic combination lock*
DIK 1147	■	■	■
DIK 1148	■	■	■
DIK 130	■	■	■
DIK 145	■	■	■

* with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 240 mm	Left door hinge	Additional shelf	Suspension file on telescopic rails	Shelf for hanging files	Special fixing kit for concrete floor
DIK 1147	■	■	■	■	■	■
DIK 1148	■	■	■	■	■	■
DIK 130	■	■	■	■	■	■
DIK 145	■	■	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.




FIREPROOF SAFES FOR DATA CARRIERS

FIREPROOF SAFE DIK



DRAWERS

Art. Nr.	Modell	Drawer and shelf number	CD-ROM	Diskette 3,5"	Streamer Tape	Streamer Tape DLT	Giga Tape 4	Giga Tape 8	Optical disc 3,5"	Microfilm cassette	Megastar	LTO	Remaining space under drawers
			140x125x5 mm	88x88x3 mm	162x107x25 mm	112x112x32 mm	81x60x16 mm	102x68x20 mm	94x90x6 mm	100x100x25 mm	137x59x16 mm	105x102x22 mm	height
DIK 1147	DIK	2	191	426	25	29	140	91	213	49	133	57	739 mm
DIK 1148	DIK	2	308	641	46	46	190	133	318	76	182	86	739 mm
DIK 130	DIK	3	308	641	46	46	190	133	318	76	182	86	896 mm
DIK 145	DIK	4	357	895	51	67	248	175	445	86	266	100	1052 mm
DIK 1147	DIK	2	382	851	49	57	279	182	426	99	266	114	591 mm
DIK 1148	DIK	2	616	1283	91	91	380	266	637	152	365	171	591 mm
DIK 130	DIK	3	616	1283	91	91	380	266	637	152	365	171	748 mm
DIK 145	DIK	4	714	1790	103	133	496	350	889	171	532	200	904 mm
DIK 1147	DIK	1	573	1277	74	86	419	274	638	148	399	171	443 mm
DIK 1148	DIK	1	923	1924	137	137	570	399	955	228	547	257	443 mm
DIK 130	DIK	2	923	1924	137	137	570	399	955	228	547	257	600 mm
DIK 145	DIK	3	1072	2685	154	200	744	524	1334	257	798	299	756 mm
DIK 1147	DIK	1	764	1702	99	114	559	365	851	198	532	228	295 mm
DIK 1148	DIK	1	1231	2565	182	182	760	532	1273	304	730	342	295 mm
DIK 130	DIK	2	1231	2565	182	182	760	532	1273	304	730	342	452 mm
DIK 145	DIK	3	1429	3580	205	266	992	699	1778	342	1064	399	608 mm
DIK 1147	DIK	1	955	2128	124	143	698	456	1064	247	665	285	147 mm
DIK 1148	DIK	1	1539	3206	228	228	950	665	1591	380	912	428	147 mm
DIK 130	DIK	2	1539	3206	228	228	950	665	1591	380	912	428	304 mm
DIK 145	DIK	3	1786	4475	257	333	1240	874	2223	428	1330	499	460 mm
DIK 1147	DIK	-	1146	2554	148	171	838	547	1277	296	798	342	-
DIK 1148	DIK	-	1847	3848	274	274	1140	798	1910	456	1094	513	-
DIK 130	DIK	1	1847	3848	274	274	1140	798	1910	456	1094	513	156 mm
DIK 145	DIK	2	2143	5369	308	399	1488	1049	2668	513	1596	599	312 mm
DIK 1147	DIK	-	-	-	-	-	-	-	-	-	-	-	-
DIK 1148	DIK	-	-	-	-	-	-	-	-	-	-	-	-
DIK 130	DIK	-	2155	4489	319	319	1330	931	2228	532	1277	599	-
DIK 145	DIK	-	2500	6264	359	466	1736	1224	3112	599	1862	698	164 mm
DIK 1147	DIK	-	-	-	-	-	-	-	-	-	-	-	-
DIK 1148	DIK	-	-	-	-	-	-	-	-	-	-	-	-
DIK 130	DIK	-	-	-	-	-	-	-	-	-	-	-	-
DIK 145	DIK	-	2858	7159	410	532	1984	1398	3557	684	2128	798	-

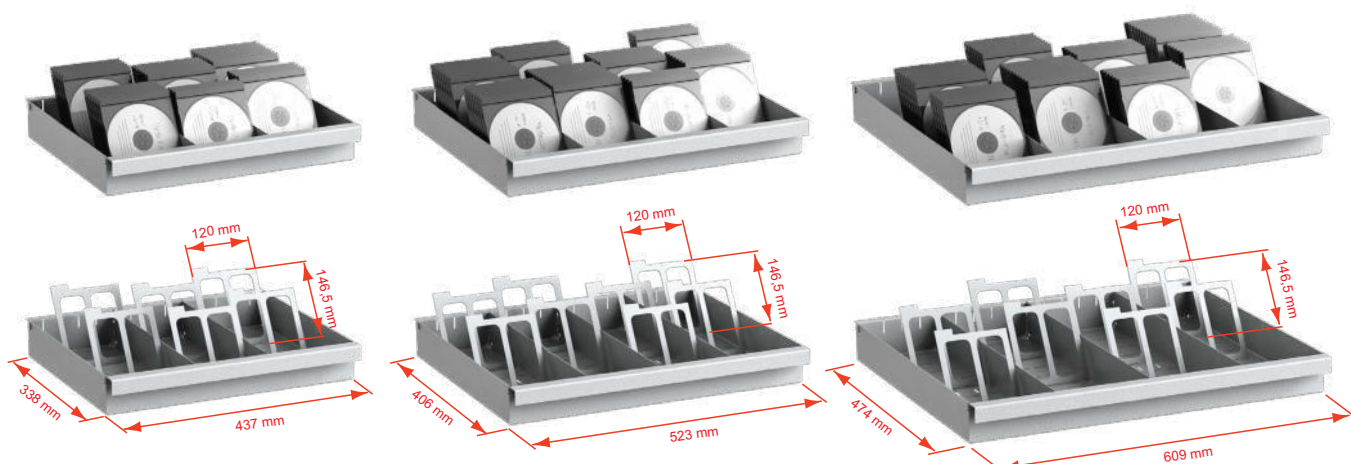

FIREPROOF SAFES FOR DATA CARRIERS

FIREPROOF SAFE DIH



Model DIH 130



SECURITY LEVEL

Class II according to EN 1143-1
certified by IMP



FIRE RATING

S 120 DIS according to EN 1047-1



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 2 fixing holes in the floor



LOCKING

High security double-bit key lock
2 keys (145 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



FIREPROOF SAFE DIH



DIH 1146

DIH 1147

DIH 130




DIH 145

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width				
DIH 1146	1143	714	662	887	478	388	887	478	2	1-leaf	164	453
DIH 1147	1143	800	730	887	564	456	887	564	2	1-leaf	228	524
DIH 130	1300	800	730	1044	564	456	1044	564	3	1-leaf	268	585
DIH 145	1456	886	798	1200	650	524	1200	650	4	1-leaf	408	740

Fittings protrude 65 mm









LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
	 Double-bit key lock	 Electronic combination lock	 Electronic combination lock*
DIH 1146	■	■	■
DIH 1147	■	■	■
DIH 130	■	■	■
DIH 145	■	■	■

* with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 240 mm	Left door hinge	Additional shelf	Suspension file on telescopic rails	Shelf for hanging files	Special fixing kit for concrete floor
						
DIH 1146	■	■	■	■	■	■
DIH 1147	■	■	■	■	■	■
DIH 130	■	■	■	■	■	■
DIH 145	■	■	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.




FIREPROOF SAFES FOR DATA CARRIERS

FIREPROOF SAFE DIH



DRAWERS

Art. Nr.	Modell	Drawer and shelf number		CD-ROM	Diskette 3,5"	Streamer Tape	Streamer Tape DLT	Giga Tape 4	Giga Tape 8	Optical disc 3,5"	Microfilm cassette	Megastar	LTO	Remaining space under drawers height	
				140x125x5 mm	88x88x3 mm	162x107x25 mm	112x112x32 mm	81x60x16 mm	102x68x20 mm	94x90x6 mm	100x100x25 mm	137x59x16 mm	105x102x22 mm		number
DIH 1146	DIH	2	1 drawer	191	426	25	29	140	91	213	49	133	57	739 mm	
DIH 1147	DIH	2		308	641	46	46	190	133	318	76	182	86	739 mm	
DIH 130	DIH	3		308	641	46	46	190	133	318	76	182	86	896 mm	
DIH 145	DIH	4	2 drawers	357	895	51	67	248	175	445	86	266	100	1052 mm	
DIH 1146	DIH	2		382	851	49	57	279	182	426	99	266	114	591 mm	
DIH 1147	DIH	2		616	1283	91	91	380	266	637	152	365	171	591 mm	
DIH 130	DIH	3	3 drawers	616	1283	91	91	380	266	637	152	365	171	748 mm	
DIH 145	DIH	4		714	1790	103	133	496	350	889	171	532	200	904 mm	
DIH 1146	DIH	1		3 drawers	573	1277	74	86	419	274	638	148	399	171	443 mm
DIH 1147	DIH	1	923		1924	137	137	570	399	955	228	547	257	443 mm	
DIH 130	DIH	2	923		1924	137	137	570	399	955	228	547	257	600 mm	
DIH 145	DIH	3	4 drawers	1072	2685	154	200	744	524	1334	257	798	299	756 mm	
DIH 1146	DIH	1		764	1702	99	114	559	365	851	198	532	228	295 mm	
DIH 1147	DIH	1		1231	2565	182	182	760	532	1273	304	730	342	295 mm	
DIH 130	DIH	2	5 drawers	1231	2565	182	182	760	532	1273	304	730	342	452 mm	
DIH 145	DIH	3		1429	3580	205	266	992	699	1778	342	1064	399	608 mm	
DIH 1146	DIH	1		5 drawers	955	2128	124	143	698	456	1064	247	665	285	147 mm
DIH 1147	DIH	1	1539		3206	228	228	950	665	1591	380	912	428	147 mm	
DIH 130	DIH	2	1539		3206	228	228	950	665	1591	380	912	428	304 mm	
DIH 145	DIH	3	6 drawers	1786	4475	257	333	1240	874	2223	428	1330	499	460 mm	
DIH 1146	DIH	-		1146	2554	148	171	838	547	1277	296	798	342	-	
DIH 1147	DIH	-		1847	3848	274	274	1140	798	1910	456	1094	513	-	
DIH 130	DIH	1	7 drawers	1847	3848	274	274	1140	798	1910	456	1094	513	156 mm	
DIH 145	DIH	2		2143	5369	308	399	1488	1049	2668	513	1596	599	312 mm	
DIH 1146	DIH	-		-	-	-	-	-	-	-	-	-	-	-	-
DIH 1147	DIH	-	8 drawers	-	-	-	-	-	-	-	-	-	-	-	
DIH 130	DIH	-		2155	4489	319	319	1330	931	2228	532	1277	599	-	
DIH 145	DIH	-		2500	6264	359	466	1736	1224	3112	599	1862	698	164 mm	
DIH 1146	DIH	-	8 drawers	-	-	-	-	-	-	-	-	-	-	-	
DIH 1147	DIH	-		-	-	-	-	-	-	-	-	-	-	-	-
DIH 130	DIH	-		-	-	-	-	-	-	-	-	-	-	-	-
DIH 145	DIH	-		2858	7159	410	532	1984	1398	3557	684	2128	798	-	

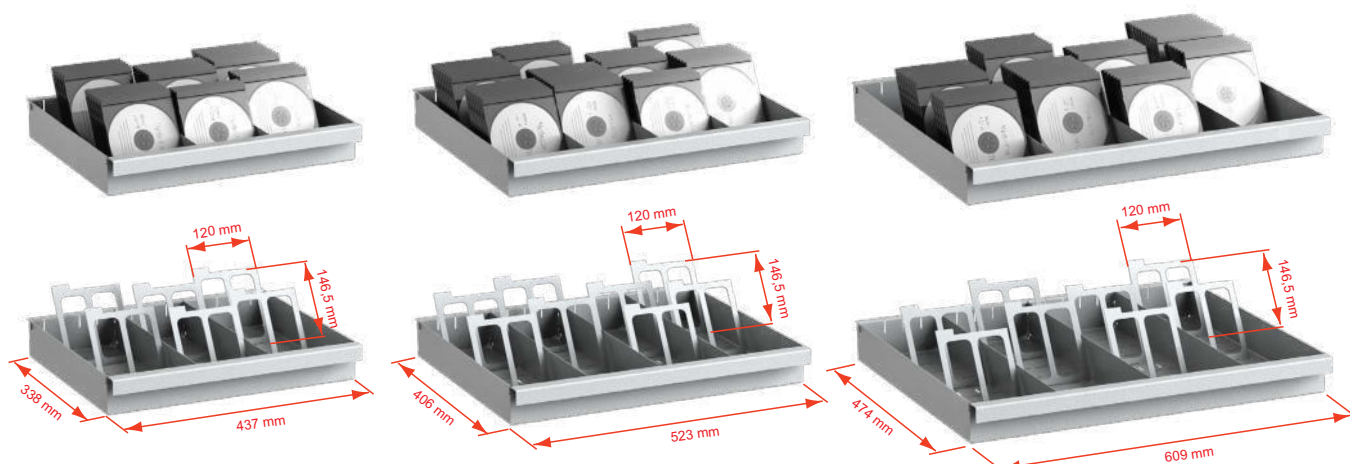


FIREPROOF SAFES FOR DATA CARRIERS

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de

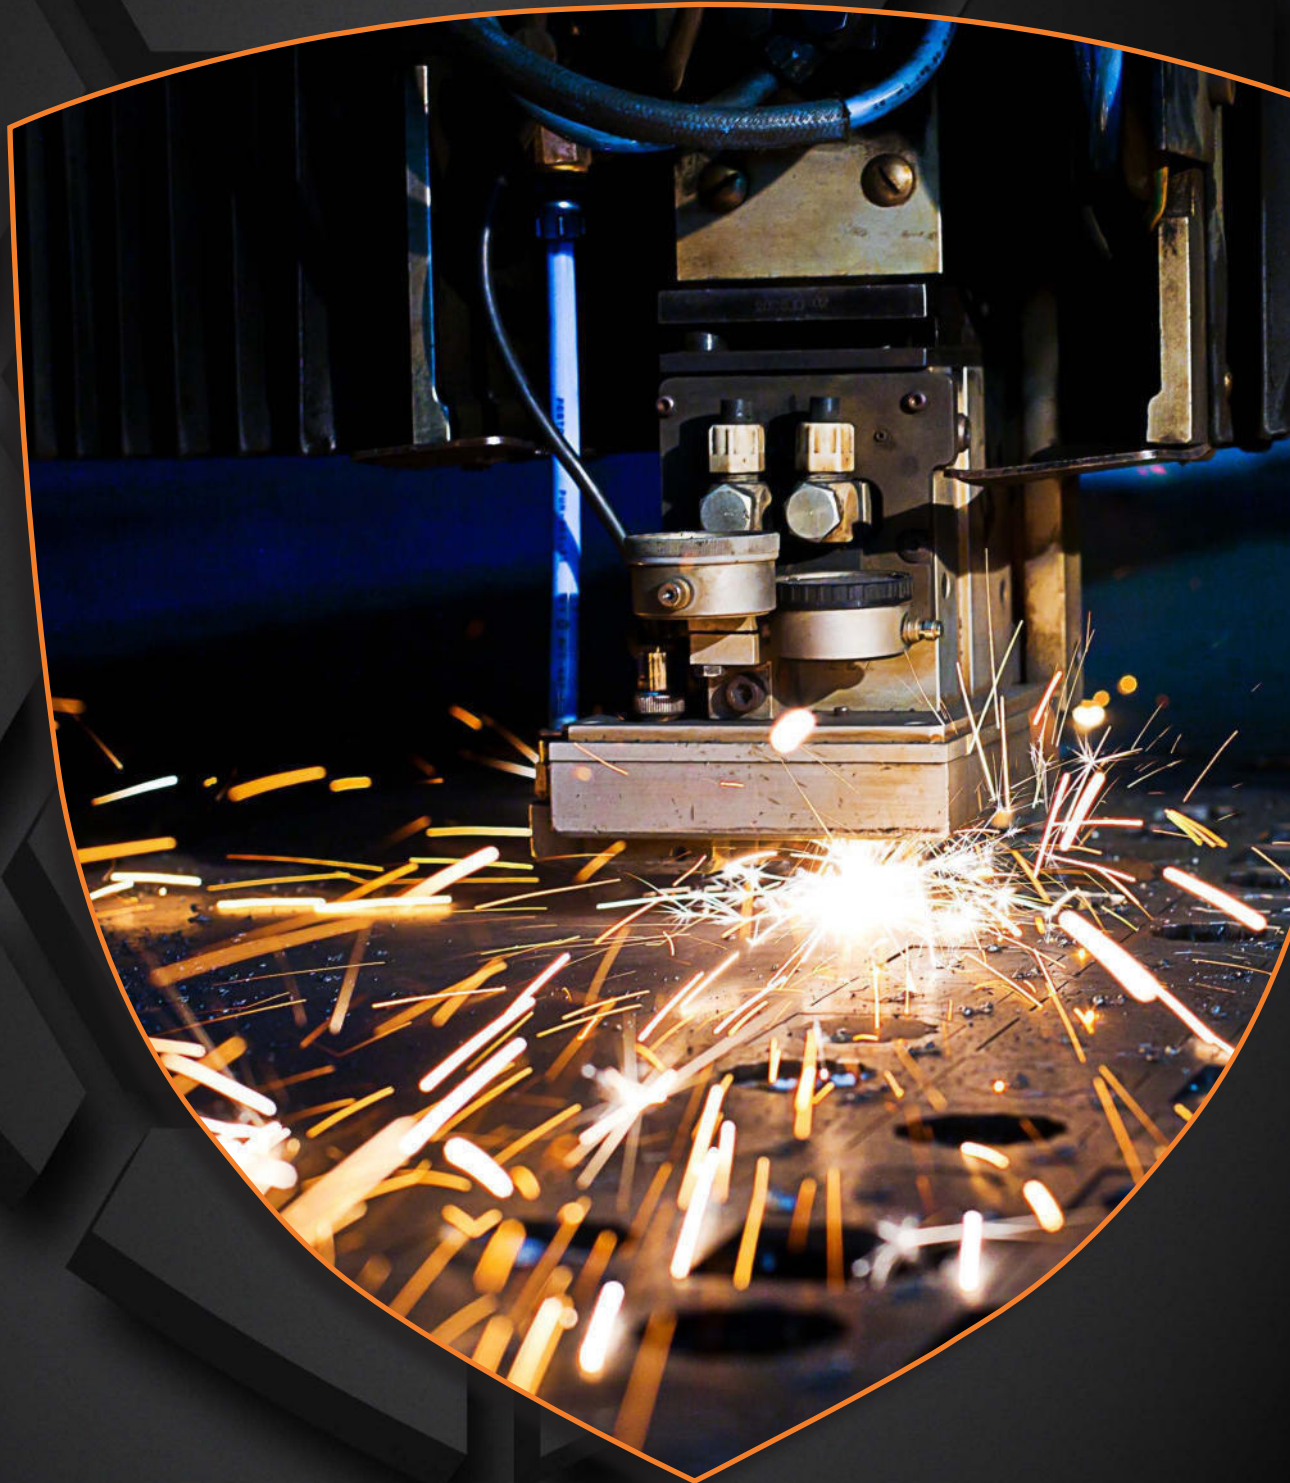



MÜLLER
SAFE



DEPOSIT/BANK EQUIPMENT

DEPOSIT SAFE MPT



Model MPT 1



SECURITY LEVEL

Equivalent to **security rating A** to VDMA 24992 (Conditions May '95), but depository slot is not certified



DESIGN

Body: Single-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Mounting holes: 4 fixing holes in the floor
Insert flap for inserting money or money bags from the front. The insertion flap can be locked with a cylinder lock (2 keys).



LOCKING

High security double-bit key lock
2 keys (65 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



DEPOSIT SAFE MPT



MPT 1





MPT 2

Model	External dim. in mm			Internal dim. in mm			Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	
MPT 1	600	250	250	400	240	190	25
MPT 2	600	460	460	400	450	400	45



LOCKING OPTIONS

	Standardlocking	Optional locking systems
Model	 Double-bit key lock	 Electronic combination lock*
MPT 1	■	■
MPT 2	■	■

* protrudes approx. 25 mm



ACCESSORIES FOR EXTRA CHARGE

Model	Additional fixing hole for designated position	Special fixing kit for concrete floor
MPT 1	 ■	 ■
MPT 2	■	■

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



DEPOSIT/BANK EQUIPMENT

DEPOSIT SAFE **GT EW**



Model GT EW



SECURITY LEVEL

Security rating B to VDMA 24992 (Conditions May '95)



DESIGN

Body: Double-walled

Door: Double-walled

Hinges: Internal

Door opening angle: 90°

Mounting holes: 1 fixing hole in the floor

Money bombs are placed in the pulled-out drawer and fall into the interior of the safe. The drawer on telescopic runners allows easy use. If the safe is located in an adjoining room and the deposit (drawer) is to be made through the masonry / wall, the wall thickness may not exceed 150 mm.



LOCKING

High security double-bit key lock

2 keys (95 mm)



PAINTING

Light gray, RAL 7035

(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



DEPOSIT SAFE GT EW



GT EW



GT EW with insert drawer

Model	External dim. in mm			Internal dim. in mm			Number Shelves	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth				
GT EW	800	600	500	560	460	360	1	5	96	300
Insert drawer	200	according to the respective cabinet		105	220	170				22



LOCKING OPTIONS

	Standardlocking	Optional locking systems			
Model	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
GT EW	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Left door hinge	Additional fixing hole for designated position	Special fixing kit for concrete floor
GT EW	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery - Technical changes reserved.



DEPOSIT/BANK EQUIPMENT

SECURITY COMPARTMENT SFE



Sample cabinet



SECURITY LEVEL

If you need a safe lock-up for the valuables of multiple users



DESIGN

Flush front; door from 3 mm steel, stand alone; for mounting with angle frame or built in safe

Height Width Depth

Each bay, to 100/330/400

Each bay, to 200/330/400

Each bay, to 300/330/500

Each bay, to 500/330/500

Each bay, to 750/330/500

The inside width of the door opening is smaller
(height: -2mm, width: - 65mm, depth:-40mm)

Hinges: Internal

Door opening angle: 90°



LOCKING

Cylinder lock

2 keys per box, (58 mm or 65 mm, due to the type of lock), standard per box



PAINTING

Light gray, RAL 7035

(special painting according to RAL colors for an extra charge)








SECURITY COMPARTMENT SFE



Sample cabinet



LOCKING OPTIONS

	Standardlocking	Optional locking systems			
Model					
	Cylinder lock	Electronic combination lock	Main locking system (Cylinder lock)	Bank lock	3-bolt lock with Double-bit key

Options for all cabinets possible



ACCESSORIES FOR EXTRA CHARGE

- Depository slot in locker door; single walled, accprding to designated dimensions
- Insert casket, for bay H = 100 mm
- Insert casket, for bay H = 150 mm
- Insert casket, for bay H = 200 mm
- Front stainless steel 1 mm, H = 100 mm
- Front stainless steel 1 mm, H = 200 mm
- Front stainless steel 1 mm; H = 300 mm
- Front stainless steel 1 mm; H = 500 mm
- Front stainless steel 1 mm; H = 750 mm
- Padestal for substructure



IMPORTANT NOTES FOR AN INQUIRY

1. Specify the dimensions of the compartments (outside / inside / doorway)
2. Specify the material thickness of the security compartment (3mm or more)
3. Division of the compartments (how many compartments above/ next to each other)
4. With or without a padestal; if with padestal = specify dimension
5. Specify locking system

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



DEPOSIT/BANK EQUIPMENT

DEPOSIT SAFE MD I



Model MD I-93V



SECURITY LEVEL

Class D-I according to EN 1143-2
certified by ECB•S



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 35 mm
Mounting holes: 4 fixing holes in the floor, 1 in the backwall*
(*not drilled through)



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



DEPOSIT SAFE MD I



MD I-93V

MD I-128V

MD I-93R

MD I-128R

MD I-93

MD I-128

Model	External dim. in mm			Internal dim. in mm			Door light		Drawer	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width		
MD I-93V	930	570	510	265	480	390	508	474	front	165
MD I-128V	1280	570	510	615	480	390	858	474	front	205
MD I-93R	930	570	510	265	480	390	508	474	on the back	165
MD I-128R	1280	570	510	615	480	390	858	474	on the back	205
MD I-93	930	570	510+270	265	480	390	508	474	protruding 270mm on the back	180
MD I-128	1280	570	510+270	615	480	390	858	474	protruding 270mm on the back	225

Fittings protrude 35 mm



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*
MD I-93V	■	■	■	■
MD I-128V	■	■	■	■
MD I-93R	■	■	■	■
MD I-128R	■	■	■	■
MD I-93	■	■	■	■
MD I-128	■	■	■	■

*with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Left door hinge	Shelf	Additional fixing hole for designated position Ø = 16 mm	Special fixing kit for concrete floor
MD I-93V	■	■	■	■
MD I-128V	■	■	■	■
MD I-93R	■	■	■	■
MD I-128R	■	■	■	■
MD I-93	■	■	■	■
MD I-128	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



DEPOSIT/BANK EQUIPMENT

DEPOSIT SAFE MD II



Model MD II-130V



SECURITY LEVEL

Class D-II according to EN 1143-2
certified by ECB•S



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 35 mm
Mounting holes: 4 fixing holes in the floor, 1 in the backwall*
(*not drilled through)



LOCKING

High security double-bit key lock
2 keys (120 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



DEPOSIT SAFE MD II



Model	External dim. in mm			Internal dim. in mm			Door light		Drawer	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width		
MD II-95V	950	590	550	265	480	390	498	474	front	284
MD II-130V	1300	590	550	615	480	390	848	474	front	356
MD II-95R	950	590	550	265	480	390	498	474	on the back	283
MD II-130R	1300	590	550	615	480	390	848	474	on the back	356
MD II-95	950	590	550+270	265	480	390	498	474	protruding 270mm on the back	328
MD II-130	1300	590	550+270	615	480	390	848	474	protruding 270mm on the back	401

Fittings protrude 35 mm



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	
MD II-95V	■	■	■	■	■
MD II-130V	■	■	■	■	■
MD II-95R	■	■	■	■	■
MD II-130R	■	■	■	■	■
MD II-95	■	■	■	■	■
MD II-130	■	■	■	■	■

* with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Left door hinge	Shelf	Additional fixing hole for designated position Ø = 16 mm	Special fixing kit for concrete floor
MD II-95V	■	■	■	■
MD II-130V	■	■	■	■
MD II-95R	■	■	■	■
MD II-130R	■	■	■	■
MD II-95	■	■	■	■
MD II-130	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



DEPOSIT/BANK EQUIPMENT

DEPOSIT SAFE MD III



Model MD III-130V



SECURITY LEVEL

Class D-III according to EN 1143-2
certified by ECB•S



DESIGN

Body: Multi-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 35 mm
Mounting holes: 4 fixing holes in the floor, 1 in the backwall*
(*not drilled through)



LOCKING

High security double-bit key lock
2 keys (135 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement



DEPOSIT SAFE MD III



Model	External dim. in mm			Internal dim. in mm			Door light		Drawer	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width		
MD III-95V	950	590	550	265	480	390	496	473	front	500
MD III-130V	1300	590	550	615	480	390	846	473	front	634
MD III-95R	950	590	550	265	480	390	496	473	on the back	504
MD III-130R	1300	590	550	615	480	390	846	473	on the back	640
MD III-95	950	590	550+270	265	480	390	496	473	protruding 270mm on the back	560
MD III-130	1300	590	550+270	615	480	390	846	473	protruding 270mm on the back	720

Fittings protrude 35 mm



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	
MD III-95V	■	■	■	■	
MD III-130V	■	■	■	■	
MD III-95R	■	■	■	■	
MD III-130R	■	■	■	■	
MD III-95	■	■	■	■	
MD III-130	■	■	■	■	

* with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Left door hinge	Shelf	Additional fixing hole for designated position Ø = 16 mm	Special fixing kit for concrete floor
MD III-95V	■	■	■	■
MD III-130V	■	■	■	■
MD III-95R	■	■	■	■
MD III-130R	■	■	■	■
MD III-95	■	■	■	■
MD III-130	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.




DEPOSIT/BANK EQUIPMENT

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de

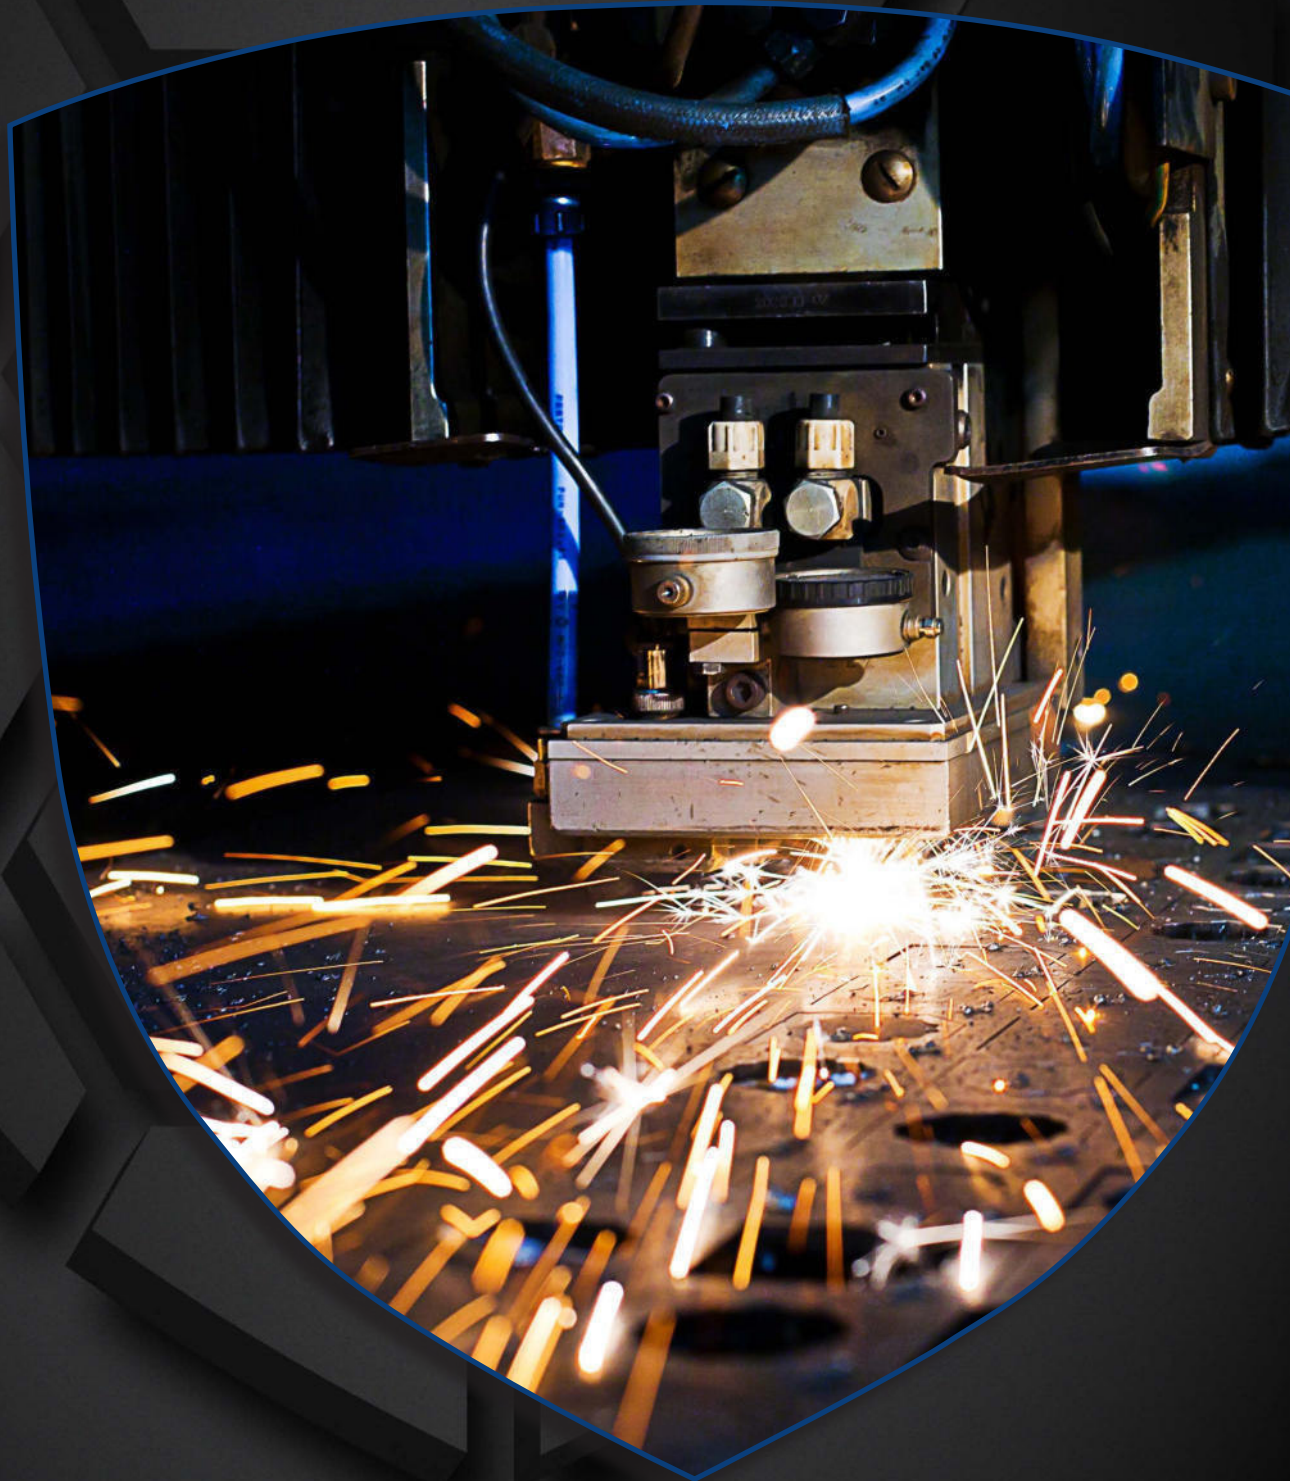



MÜLLER
SAFE



AUTHORITIES

STEEL CABINET SG I VS



Model SG I VS 2



SECURITY LEVEL

Class I according to BSI TL 03406 and TL 03407; tested and approved.

The steel cabinets SG I VS are subject to a quality assurance procedure by the BSI, which carries out random product audits (quality check).



DESIGN

Body: Single-walled

Door: Double-walled

Hinges: External

Door opening angle: 180°

Handle/fitings: Protrudes 65 mm

Mounting holes: 4 fixing holes in the floor



LOCKING

Strong central locking mechanism with three-sided locking; Double-bit high security lock (BSI approval and lock class C) with 13 tumblers
2 keys (150 mm) and a mechanical combination lock that covers the key channel when closed.

The lock and boltwork are secured against drilling open by special armor plates. Every opening process is recorded in a non-resettable counter.



PAINTING


Light gray, RAL 7035

(special painting according to RAL colors for an extra charge)



AUTHORITIES

STEEL CABINET SG I VS

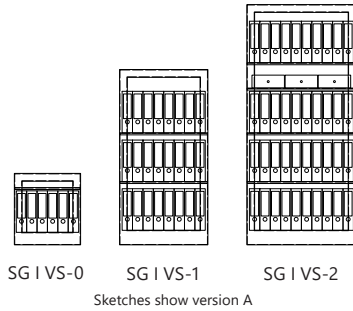

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
SG I VS-0	550	510	430	450	500	340	450	390	1	1-leaf	6	79	110
SG I VS-1	1350	680	520	1235	670	430	1235	556	2	1-leaf	24	359	344
SG I VS-2	1850	840	520	1723	830	430	1723	716	4	1-leaf	40	622	403

Fittings protrude 65 mm

Equipment variants:

Version A (= shelves):

Size 0 = 1 shelf

Size 1 = 2 shelves

Size 2 = 4 shelves

Version B:

Size 1 = 1 interior safe + 1 shelf

Size 2 = 1 interior safe + 3 shelves

Version C:

Size 1 = 3 interior safes

Size 2 = 3 interior safes with 1 shelf each

Version D:

Size 1 = 2 interior safes next to each other + 1 shelf

Size 2 = 2 interior safes next to each other + 3 shelves

Version E:

Size 1 = 6 interior safes, 2 next to each other, 3 on top of each other

Size 2 = 6 interior safes, 2 next to each other, 3 on top of each other, each with 1 shelf



LOCKING OPTIONS

	Standardlocking	Optional locking systems
Model	Double lock (Double-bit key lock, Mechanical combination lock)	Double lock (Double-bit key lock, Electronic combination lock*)
SG I VS-0	■	■
SG I VS-1	■	■
SG I VS-2	■	■

* SECU Selo C

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



AUTHORITIES

STEEL CABINET SG II VS



Model SG II VS 1



SECURITY LEVEL

Security grade II according to BSI TL 03406 and TL 03408; tested and approved.

The steel cabinets SG II VS are subject to a quality assurance procedure by the BSI, which carries out random product audits (quality check). All-round fire fold on the door.



DESIGN

Body: Double-walled

Door: Multi-walled

Hinges: External

Door opening angle: 180°

Handle/fittings: Protrudes 65 mm



LOCKING

Strong central locking mechanism with three-sided locking; Double-bit high security lock (BSI approval and lock class C) with 13 tumblers
2 keys (150 mm) and a mechanical combination lock that covers the key channel when closed.

The lock and boltwork are secured against drilling open by special armor plates. Every opening process is registered in a non-resettable counter




PAINTING

Light gray, RAL 7035

(special painting according to RAL colors for an extra charge)



STEEL CABINET SG II VS

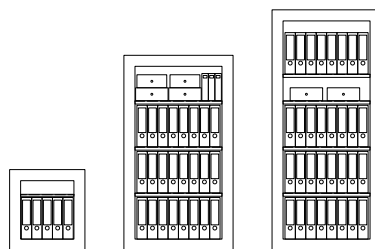

SG II VS-0 SG II VS-1 SG II VS-2

Sketches show version A

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
SG II VS-0*	620	580	560	450	410	350	450	410	1	1-leaf	5	65	185
SG II VS-1	1500	840	685	1300	670	480	1300	670	3	1-leaf	24	418	410
SG II VS-2	1850	840	685	1650	670	480	1650	670	4	1-leaf	32	530	497

Fittings protrude 65 mm, * 4 fixing holes in the backwall

Equipment variants:

Version A (= shelves):

Size 0 = 1 shelf

Size 1 = 3 shelves

Size 2 = 4 shelves

Version B:

Size 1 = 1 interior safe + 2 shelf

Size 2 = 1 interior safe + 3 shelves

Version C:

Size 1 = 3 interior safes

Size 2 = 3 interior safes with 1 shelf each

Version D:

Size 1 = 2 interior safes next to each other + 2 shelf

Size 2 = 2 interior safes next to each other + 3 shelves

Version E:

Size 1 = 6 interior safes, 2 next to each other, 3 on top of each other

Size 2 = 6 interior safes, 2 next to each other, 3 on top of each other, each with 1 shelf



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems
		<p>Double lock (Double-bit key lock, Mechanical combination lock)</p>
SG II VS-0	■	■
SG II VS-1	■	■
SG II VS-2	■	■

* SECU Selo C

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



AUTHORITIES

VS-SECURITY DOOR II VST 2



SECURITY LEVEL

Tested and approved by construction according to technical requirements BSI TL 03410. All-round fire fold.



DESIGN

Double-walled, heavy design made of high quality steel
A thick armor plate protects the lock area against mechanical burglary tools

Hinges: External

Door opening angle: 180°

Handle/fittings: Protrudes 65 mm



LOCKING

Strong central locking mechanism with double-bit high security lock (BSI approval and lock class A)

2 keys (150 mm) and a mechanical combination lock

Each door closure is recorded and registered by a non-resettable counter.



PAINTING

Light gray, RAL 7035

(special painting according to RAL colors for an extra charge)

NOTE

VS Security Doors II are primarily intended as access doors for file security rooms at offices within the scope of the classified information instruction (VSA). They are manufactured according to the technical guidelines of the Federal Office for Information Security (BSI).



VS-VS-SECURITY DOOR II VST 2



VST 2

Model	Frame size in mm		Wall opening in mm		Door light		Weight (Kg)
	Height	Width	Height	Width	Height	Width	
VST 2	2100	1150	2050	1050	1912	920	270

Fittings protrude 65 mm

The corner frame is standard on all VS doors

All doors with a width of 1000 mm or more are also available in a double-leaf version. Special dimensions are possible.

The frame depth (= wall thickness) is 240 mm as standard. Special dimensions are possible.

For wall thicknesses less than 180 mm, fastening by screwing through the frame bushes is not recommended. Fastening should therefore be done by special brackets after consultation.



LOCKING OPTIONS

	Standardlocking	Optional locking systems
Model	<p>Double lock (Double-bit key lock, Mechanical combination lock)</p>	<p>Double lock (Double-bit key lock, Electronic combination lock*)</p>
VST 2	■	■

* SECU Selo C



ACCESSORIES FOR EXTRA CHARGE

Model	Burglar alarm system, consisting of opening detector, locking monitoring, breakthrough monitoring (seismic detector)
VST 2	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



AUTHORITIES

KEY CASE **SEB**



Model SEB, Gr. 2



SECURITY LEVEL

Tested and approved by construction according to technical requirements BSI TL 03409.



DESIGN

Outside:

Body: Single-walled

Door: Double-walled

Fittings: Protruding 30 mm

Inside:

With inner compartments (only possible with size 0 key bar with 7 hooks)

Compartment dimensions: height 70 mm, width 160 mm, depth 95 mm; other dimensions are possible on request

The built-in key compartments are provided with double-bit key locks, each with 8 tumblers. Locks are guaranteed to lock differently among each other.

Hinges: External

Door opening angle: 180°



KEY CASE SEB



LOCKING

Strong central locking mechanism with three-sided locking and mechanical combination lock. An electronic key lock can be used as an alternative to the mechanical combination lock. All locks correspond to the **BSI's approved lock list**.

The lock and bolt works are secured against drilling open by armored plates.



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement

Model	External dim. in mm			Number of key compartments	Weight (Kg)
	Height	Width	Depth		
Key case, Size 0	293	250	190	1-3*	17
Key case, Size 1	295	420	190	4-6	26
Key case, Size 2	508	420	190	7-12	49
Key case, Size 3	941	420	190	13-24	87

* optionally with 7 hooks



LOCKING OPTIONS

	Standardlocking	Optional locking systems
	 Mechanical combination lock	 Electronic combination lock SELO B
SEB, Size 0	■	■
SEB, Size 1	■	■
SEB, Size 2	■	■
SEB, Size 3	■	■

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



AUTHORITIES

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de





MÜLLER
SAFE



GUN SAFES

GUN SAFE KGW



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB•S



DESIGN

Body: Double-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle: Protruding 12 mm
Mounting holes: 1 fixing hole in the floor, 2 in the backwall



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



GUN SAFE KGW





KGW

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Gun-holder	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
KGW	440	330	165	390	282	55	330	255	0	1-leaf	2	0	30

Fittings protrude 30 mm



LOCKING OPTIONS

	Standardlocking	Optional locking systems
		
Model	Double-bit key lock	Electronic combination lock
KGW	■	■

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



GUN SAFES

GUN SAFE WFS



Model WFS 10



SECURITY LEVEL

S1 according to EN 14450
A according to VDMA 24992 (Conditions May '95)



DESIGN

Body: Single-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Handle: Protruding 12 mm
Mouting holes: 2 fixing holes in the floor, 2 in the backwall



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



GUN SAFE WFS



WFS 6

WFS 10

WFS 15



Model	External dim. in mm			Internal dim. in mm			Adjustment Height (mm)	Door 1 / 2-leaf	Number Gunholder	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth				
WFS 6	1450	280	320	1245	274	255	1215	1-leaf	6	63
WFS 10	1450	430	350	1245	424	284	1215	1-leaf	10	84
WFS 15	1450	630	420	1245	624	260	1215	1-leaf	15	115

Fittings protrude 12 mm

Model	Inner safe external dim. in mm			Inner safe internal dim. in mm		
	Height	Width	Depth	Height	Width	Depth
WFS 6	200			190	274	219
WFS 10	200			190	424	275
WFS 15	200			190	624	314





LOCKING OPTIONS

	Standardlocking	Optional locking systems
Model	 Double-bit key lock	 Electronic combination lock
WFS 6	■	■
WFS 10	■	■
WFS 15	■	■



ACCESSORIES FOR EXTRA CHARGE

Model	Additional fixing hole for designated position Ø = 13 mm	Special fixing kit for concrete floor
WFS 6	 ■	 ■
WFS 10	■	■
WFS 15	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



GUN SAFES

GUN SAFE WSL0



Model WSL0-4/7



SECURITY LEVEL

Class 0 according to EN 1143-1
certified by ECB•S



DESIGN

Body: Double-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle: Protruding 30 mm
Mounting holes: 1 fixing hole in the floor,
1 in the backwall (not drilled through)



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035 or Graphite gray, RAL 7024
(special paint according to RAL colors for an extra charge)



GUN SAFE WSL0






Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Number Gunholder	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width			
WSL0-1/5	1250	350	350	1200	300	240	1138	254	0	5	105
WSL0-2/7	1250	450	350	1200	400	240	1138	354	0	7	122
WSL0-3/5	1500	350	350	1450	300	240	1388	254	1	5	126
WSL0-4/7	1500	450	350	1450	400	240	1388	354	1	7	145
WSL0-5/9	1500	450	450	1450	400	340	1388	354	1	9	165

Fittings protrude 30 mm



LOCKING OPTIONS

Model	Standardlocking	Optional locking system	
			
	Double-bit key lock	Electronic combination lock	Electronic combination lock*
WSL0-1/5	■	■	■
WSL0-2/7	■	■	■
WSL0-3/5	■	■	■
WSL0-4/7	■	■	■
WSL0-5/9	■	■	■

* with emergency key

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



GUN SAFES

GUN SAFE WSLO XL



Model WSLO-10/20



SECURITY LEVEL

Class 0 according to EN 1143-1
certified by ECB•SS



DESIGN

Body: Double-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor,
1 in the backwall (not drilled through)



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035 or Graphite gray, RAL 7024
(special paint according to RAL colors for an extra charge)



GUN SAFE WSL0 XL



WSL0-6/16

WSL0-7/17

WSL0-8/18

WSL0-9/16

WSL0-10/20

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Number Gunholder	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width			
WSL0-6/16	1500	550	450	1450	500	340	1388	454	2	16	175
WSL0-7/17	1600	655	500	1550	605	390	1488	559	2+2	17	242
WSL0-8/18	1600	600	500	1550	550	390	1488	504	2	18	220
WSL0-9/16	1600	550	500	1550	500	390	1488	454	2	16	207
WSL0-10/20	1600	655	500	1550	605	390	1488	559	2	20	232

Fittings protrude 65 mm, weapon holder on rails adjustable in height and depth

Model	Gun holder per rail		Hooks	Ramrod holder	Partition wall
	back (55 mm)	front (65mm)			
WSL0-6/16	9	7	7	1	0
WSL0-7/17	7+3	5+2	7	1	1
WSL0-8/18	10	8	8	1	0
WSL0-9/16	9	7	11	1	0
WSL0-10/20	11	9	11	1	0



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
	Double-bit key lock	Electronic combination lock	Electronic combination lock*
WSL0-6/16	■	■	■
WSL0-7/17	■	■	■
WSL0-8/18	■	■	■
WSL0-9/16	■	■	■
WSL0-10/20	■	■	■

* with emergency key

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



GUN SAFES

GUN SAFE WSL1



Modell WSL1-4/7



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB•S



DESIGN

Body: Double-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle: Protruding 30 mm
Mounting holes: 1 fixing hole in the floor,
1 in the backwall (not drilled through)



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035 or Graphite gray, RAL 7024
(special paint according to RAL colors for an extra charge)



GUN SAFE WSL1



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Number Gunholder	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width			
WSL1-1/5	1250	350	350	1200	300	240	1138	254	0	5	109
WSL1-2/7	1250	450	350	1200	400	240	1138	354	0	7	126
WSL1-3/5	1500	350	350	1450	300	240	1388	254	1	5	131
WSL1-4/7	1500	450	350	1450	400	240	1388	354	1	7	150
WSL1-5/9	1500	450	450	1450	400	340	1388	354	1	9	170
WSL1K-1/4	1500	450	450	1450	400	340	1388	354	3	4	172
WSL1K-2/7	1500	550	450	1450	500	340	1388	454	3	7	199

Fittings protrude 30 mm

Model	Gun holder per rail		Number Hooks	Number Ramrod holder	Number Partition wall
	back (55 mm)	front (65mm)			
WSL1K-1/4	4	-	4	1	1
WSL1K-2/7	4	3	7	1	1



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
	Double-bit key lock	Electronic combination lock	Electronic combination lock*
WSL1-1/5	■	■	■
WSL1-2/7	■	■	■
WSL1-3/5	■	■	■
WSL1-4/7	■	■	■
WSL1-5/9	■	■	■
WSL1K-1/4	■	■	■
WSL1K-2/7	■	■	■

* with emergency key

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



GUN SAFES

GUN SAFE WSL1 XL



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB•S



DESIGN

Body: Double-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor,
1 in the backwall (not drilled through)



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035 or Graphite gray, RAL 7024
(special paint according to RAL colors for an extra charge)



GUN SAFE WSL1 XL



WSL1-6/16

WSL1-7/17

WSL1-8/18

WSL1-9/16

WSL1-10/20

WSL1-11/26

WSL1-12/14

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Number Gunholder	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width			
WSL1-6/16	1500	550	450	1450	500	340	1388	454	2	16	179
WSL1-7/17	1600	655	500	1550	605	390	1488	559	2+2	17	247
WSL1-8/18	1600	600	500	1550	550	390	1488	504	2	18	225
WSL1-9/16	1600	550	500	1550	550	390	1488	454	2	16	212
WSL1-10/20	1600	655	500	1550	605	390	1488	559	2	20	237
WSL1-11/26	1600	850	500	1550	800	390	1488	754	2	26	285
WSL1-12/14	1600	850	500	1550	800	390	1488	754	6	14	296

Fittings protrude 65 mm, weapon holder on rails adjustable in height and depth

Model	Gun holder per rail		Number Hooks	Number Ramrod holder	Number Partition wall
	back (55 mm)	front (65mm)			
WSL1-6/16	9	7	7	1	0
WSL1-7/17	7+3	5+2	7	1	1
WSL1-8/18	10	8	8	1	0
WSL1-9/16	9	7	11	1	0
WSL1-10/20	11	9	11	1	0
WSL1-11/26	14	12	11	1	0
WSL1-12/14	8	6	11	1	1



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
	Double-bit key lock	Electronic combination lock	Electronic combination lock*
WSL1-6/16	■	■	■
WSL1-7/17	■	■	■
WSL1-8/18	■	■	■
WSL1-9/16	■	■	■
WSL1-10/20	■	■	■
WSL1-11/26	■	■	■
WSL1-12/14	■	■	■

* with emergency key

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



GUN SAFES

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de





MÜLLER
SAFE



FURNITURE SAFES

FURNITURE SAFE PT



Model PT 8



SECURITY LEVEL

S2 according to EN 14450
B according to VDMA 24992 (Conditions May '95)



DESIGN

Body: Double-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Mounting holes: 2 fixing holes in the floor, 2 in the backwall



LOCKING

High security double-bit key lock
2 keys (65 mm)




PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




FURNITURE SAFE PT

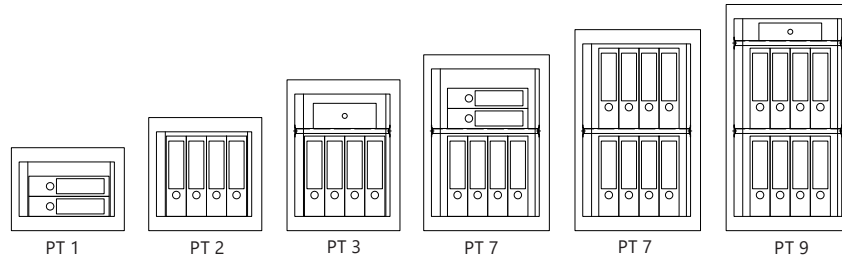

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
PT 1	330	450	380	235	380	300	200	330	1	1-leaf	2	26	34
PT 2	450	450	380	355	380	300	320	330	1	1-leaf	5	40	41
PT 3	600	450	380	505	380	300	470	330	1	1-leaf	6	57	52
PT 7	700	500	450	605	410	370	570	360	1	1-leaf	8	81	70
PT 8	800	500	450	705	410	370	670	360	2	1-leaf	10	91	80
PT 9	900	500	450	805	410	370	770	360	2	1-leaf	11	122	90




LOCKING OPTIONS

Model	Standardlocking	Optional locking systems
		 Double-bit key lock
PT 1	■	■
PT 2	■	■
PT 3	■	■
PT 7	■	■
PT 8	■	■
PT 9	■	■



ACCESSORIES AT EXTRA CHARGE

Model	Additional shelf	Special fixing kit for concrete floor
		
PT 1	■	■
PT 2	■	■
PT 3	■	■
PT 7	■	■
PT 8	■	■
PT 9	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FURNITURE SAFES



**MÜLLER
SAFE**

FURNITURE SAFE MN / MNO



Model MNO 12



SECURITY LEVEL

Class 0 according to EN 1143-1
certified by ECB-S



DESIGN

Body: Double-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Mounting holes: 1 fixing hole in the floor



LOCKING

High security double-bit key lock
2 keys (95 mm)




PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



FURNITURE SAFES



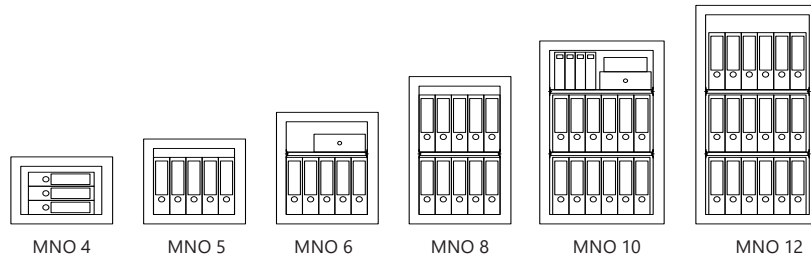


FURNITURE SAFE MN / MNO



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
MN 2	376	496	270	270	395	120	270	320	1	1-leaf	0	12	56
MN 3	476	496	270	370	395	120	370	320	1	1-leaf	0	17	77
MN 4	376	496	360	270	395	210	270	320	1	1-leaf	0	22	65
MN 5	476	496	360	370	395	210	370	320	1	1-leaf	0	30	78
MN 6	636	496	360	530	395	210	530	320	2	1-leaf	0	43	108
MN 8	836	496	360	730	395	210	730	320	2	1-leaf	0	59	118
MNO 4	376	496	450	270	395	300	270	320	1	1-leaf	3	33	81
MNO 5	476	496	450	370	395	300	370	320	1	1-leaf	5	43	92
MNO 6	636	496	450	530	395	300	530	320	2	1-leaf	5	61	118
MNO 8	836	496	450	730	395	300	730	320	2	1-leaf	10	85	135
MNO 10	1026	606	450	920	505	300	920	430	2	1-leaf	12	139	213
MNO 12	1226	606	450	1120	505	300	1120	430	3	1-leaf	18	169	256



LOCKING OPTIONS

Standardlocking	Optional locking systems			
				
Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)

Options for the entire series possible

* with emergency key, protruding approx 25 mm ** from MN 6 / MNO 6, other lock options are also possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 130 mm	Inner safe Height = 200 mm	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
MN 2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MN 3	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MN 4	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MN 5	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MN 6	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MN 8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MNO 4	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MNO 5	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MNO 6	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MNO 8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MNO 10	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MNO 12	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FURNITURE SAFES

FURNITURE SAFE MV / MVO



Modell MVO 10



SECURITY LEVEL

Class I according to EN 1143-1
certified by ECB-S



DESIGN

Body: Double-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Mounting holes: 1 fixing hole in the floor



LOCKING

High security double-bit key lock
2 keys (95 mm)




PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)





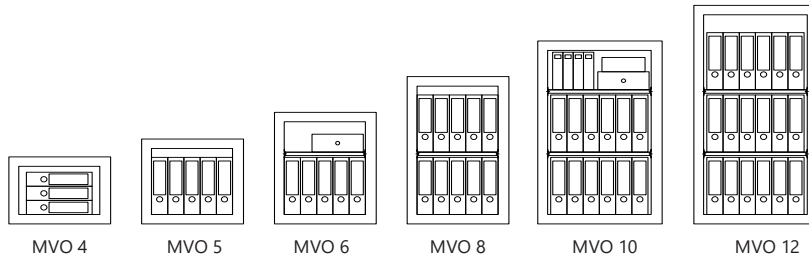


FURNITURE SAFE MV / MVO



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
MV 2	376	496	270	270	395	120	270	320	1	1-leaf	0	12	56
MV 3	476	496	270	370	395	120	370	320	1	1-leaf	0	17	77
MV 4	376	496	360	270	395	210	270	320	1	1-leaf	0	22	65
MV 5	476	496	360	370	395	210	370	320	1	1-leaf	0	30	78
MV 6	636	496	360	530	395	210	530	320	2	1-leaf	0	43	108
MV 8	836	496	360	730	395	210	730	320	2	1-leaf	0	59	118
MVO 4	376	496	450	270	395	300	270	320	1	1-leaf	3	33	81
MVO 5	476	496	450	370	395	300	370	320	1	1-leaf	5	43	92
MVO 6	636	496	450	530	395	300	530	320	2	1-leaf	5	61	118
MVO 8	836	496	450	730	395	300	730	320	2	1-leaf	10	85	135
MVO 10	1026	606	450	920	505	300	920	430	2	1-leaf	12	139	213
MVO 12	1226	606	450	1120	505	300	1120	430	3	1-leaf	18	169	256



LOCKING OPTIONS

Standardlocking	Optional locking systems			
				
Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)

Options for the entire series possible

* with emergency key, protruding approx 25 mm ** from MV 6 / MVO 6, other lock combinations are also possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 130 mm	Inner safe Height = 200 mm	Left door hinge	Additional shelf	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
MV 2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MV 3	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MV 4	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MV 5	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MV 6	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MV 8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MVO 4	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MVO 5	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MVO 6	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MVO 8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MVO 10	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MVO 12	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FURNITURE SAFES

HOTELSAFES HT



HOTELSAFE HT-D

DESIGN

Body: All-round stable sheet steel
Mounting holes: 3 fixing holes in the backwall, 1 in the floor

Automatic opening and locking by motor drive

LOCKING

Electronic combination lock with mastercode with emergency key

PAINTING

Cream, RAL 9001



HOTELTSAFE HT-DCP

DESIGN

Body: All-round stable sheet steel
Mounting holes: 3 fixing holes in the backwall, 1 in the floor

Automatic opening and locking by motor drive
with card swipe for credit card

LOCKING

Electronic combination lock with mastercode with emergency key

PAINTING

Cream, RAL 9001



HOTELSAFE HT-HL

DESIGN

Body: All-round stable sheet steel
Mounting holes: 3 fixing holes in the backwall, 1 in the floor

Automatic opening and locking by motor drive
Suitable for locking/storing a laptop

LOCKING

Electronic combination lock with mastercode with emergency key

PAINTING

Cream, RAL 9001

Model	External dim. in mm			Internal dim. in mm			Mounting holes		Number Shelves	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Floor	Backwall		
HT-D	250	350	250	220	340	200	1	3	1	10
HT-DCP	230	405	365	200	400	300	1	3	-	15
HT-HL	204	420	370	180	415	300	1	3	-	13

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.

HOTELSAFES HT



HT-PL2031



DESIGN

Body: All-round stable sheet steel
Mounting holes: 2 fixing holes in the backwall, 2 in the floor
Automatic opening and locking by motor drive



LOCKING

Electronic combination lock with mastercode
 with emergency key



PAINTING

Anthracite



Model	External dim. in mm			Internal dim. in mm			Mounting holes		Number Shelves	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Floor	Backwall		
HT-PL2031	200	310	200	196	296	140	2	2	0	6
HT-PL2535	250	350	250	246	346	190	2	2	0	8
HT-PL2042	200	420	370	196	416	310	2	2	0	10
HT-PL2047	200	470	370	196	466	310	2	2	0	10

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



FURNITURE SAFE MHT



SECURITY LEVEL

Steel housing, robust against access



LOCKING

Electronic combination lock with emergency key



MHT 25



MHT 40



MHT 65

Model	External dim. in mm			Internal dim. in mm			Mounting holes		Number Shelves	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Floor	Backwall		
MHT 25	250	350	250	247	347	188	4	2	1	8
MHT 40	400	400	350	397	397	304	4	2	1	18
MHT 65	650	400	350	647	397	304	4	2	2	23



Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de





MÜLLER
SAFE



WALL SAFES

SOCKET SAFE STW



Model STW 1



HANDLING

Remove the dummy socket that is fastened with a snap lock. Open the lock and pull out the middle drawer. One after the other, bring the two side drawers to the middle position and remove them. Take out the base plate. It is inserted in the reverse order.

Only the dummy socket is visible when the safe is closed. The central and side drawers are easy to remove. This safe is especially suitable for jewellery. Space is available for cash, saving books, cheques, passports etc, after the base plate has been removed no accessories for this safe.



DESIGN

Body: 2 mm thick from high quality steel



LOCKING

Socket dummy with snap lock, Middle drawer with a double-bit high security lock with 7 tumblers
2 keys (58 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



SOCKET SAFE STW



Model	External dim. in mm			Internal dim. in mm			Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	
STW 1	130	360	130	126	330	105	4



LOCKING OPTIONS

Standardlocking	
Model	+
STW 1	Double-bit key lock

As of 12/2020 - decorative material not included -Technical changes reserved.



WALL SAFES

WALL SAFE WB



Model WB 36



SECURITY LEVEL

According to VDMA 24992 (Conditions May '95)



DESIGN

Body: Single-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Safe to be built into a wall



LOCKING

High security double-bit key lock
2 keys (65 mm)




PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



WALL SAFE WB

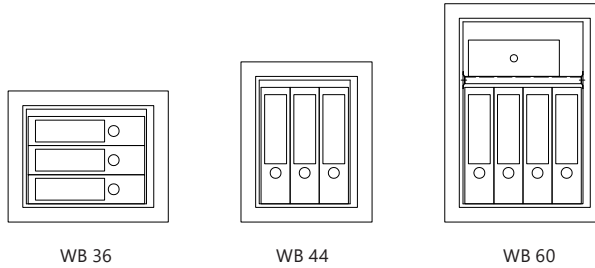

WB 36


WB 44

WB 60

Model	External dim. in mm			Internal dim.in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
WB 28	280	280	160	180	220	95	180	160	1	1-leaf	0	3	11
WB 36	360	440	365	260	380	300	260	320	1	1-leaf	3	29	23
WB 44	440	360	365	340	300	300	340	240	1	1-leaf	3	30	23
WB 60	600	440	365	500	380	300	500	320	1	1-leaf	4	57	32



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems
		 Double-bit key lock
WB 28	■	□
WB 36	■	■
WB 44	■	■
WB 60	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



WALL SAFES



MÜLLER
SAFE

WALL SAFE VN / VNO



Model VNO 8



SECURITY LEVEL

Class 0 according to EN 1143-1
certified to ECB-S



DESIGN

Body: Single-walled
Door: Double-walled
Hinges: Internal
Door opening : 90°
Safe to be built into a wall



LOCKING

High security double-bit key lock
2 keys (95 mm)




PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



WALL SAFES



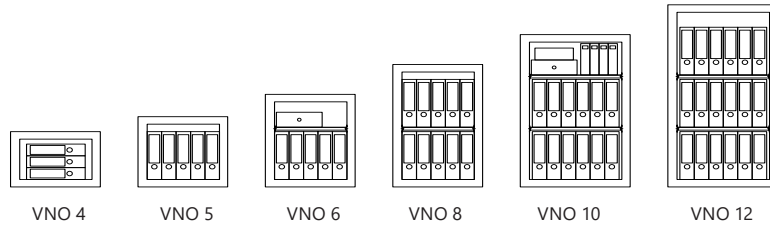


WALL SAFE VN / VNO



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
VN 2	370	490	210	270	395	120	270	320	1	1-leaf	0	12	35
VN 3	470	490	210	370	395	120	370	320	1	1-leaf	0	17	49
VN 4	370	490	300	270	395	120	270	320	1	1-leaf	0	22	37
VN 5	470	490	300	370	395	210	370	320	1	1-leaf	0	30	52
VN 6	620	490	300	520	395	210	520	320	2	1-leaf	0	43	66
VN 8	820	490	300	720	395	210	720	320	2	1-leaf	0	59	86
VNO 4	370	490	390	270	395	300	270	320	1	1-leaf	3	32	39
VNO 5	470	490	390	370	395	300	370	320	1	1-leaf	5	43	55
VNO 6	620	490	390	520	395	300	520	320	2	1-leaf	5	61	75
VNO 8	820	490	390	720	395	300	720	320	2	1-leaf	10	85	89
VNO 10	1020	600	390	920	505	300	920	430	2	1-leaf	12	139	140
VNO 12	1220	600	390	1120	505	300	1120	430	3	1-leaf	18	169	170



LOCKING OPTIONS





Standardlocking	Optional locking systems			
				
Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)

Options for the entire series possible

* with emergency key, protruding approx 25 mm **from VN 6 / VNO 6, other lock options possible



ACCESSORIES AT EXTRA CHARGE

Model	Inner safe Height= 130 mm	Inner safe Height = 200 mm	Left door hinge	Additional shelf
VN 2				
VN 2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VN 3	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VN 4	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VN 5	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VN 6	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VN 8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VNO 4	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VNO 5	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VNO 6	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VNO 8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VNO 10	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VNO 12	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.




WALL SAFES



**MÜLLER
SAFE**

WALL SAFE VC / VCO

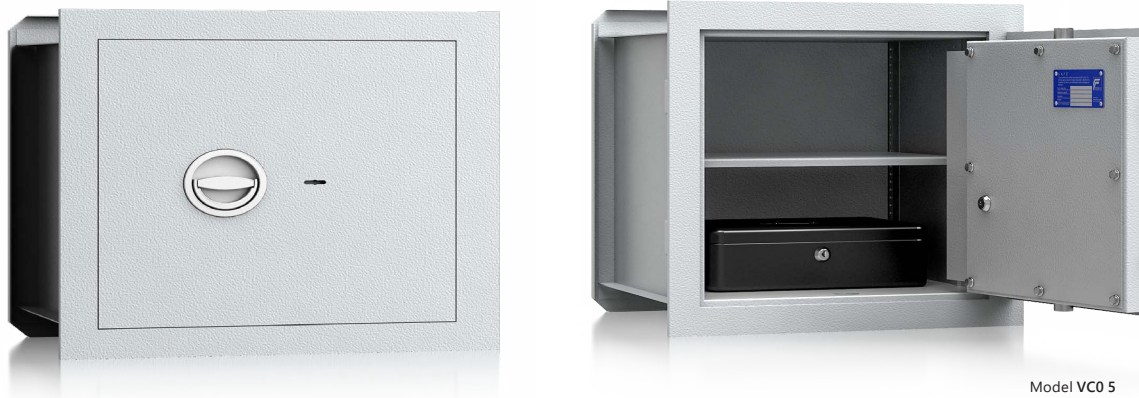

Model VC0 5



SECURITY LEVEL

Class I according to EN 1143-1
certified to ECB-S



DESIGN

Body: Single-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Safe to be built into a wall



LOCKING

High security double-bit key lock
2 keys (95 mm)




PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



WALL SAFES



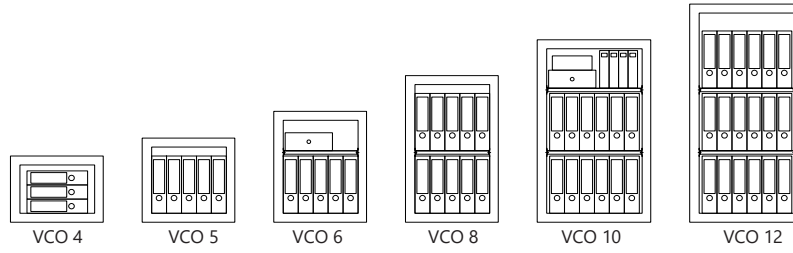


WALL SAFE VC / VCO



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
VC 2	370	490	210	270	395	120	270	320	1	1-leaf	0	12	35
VC 3	470	490	210	370	395	120	370	320	1	1-leaf	0	17	49
VC 4	370	490	300	270	395	120	270	320	1	1-leaf	0	22	37
VC 5	470	490	300	370	395	210	370	320	1	1-leaf	0	30	52
VC 6	620	490	300	520	395	210	520	320	2	1-leaf	0	43	66
VC 8	820	490	300	720	395	210	720	320	2	1-leaf	0	59	86
VCO 4	370	490	390	270	395	300	270	320	1	1-leaf	3	32	39
VCO 5	470	490	390	370	395	300	370	320	1	1-leaf	5	43	55
VCO 6	620	490	390	520	395	300	520	320	2	1-leaf	5	61	75
VCO 8	820	490	390	720	395	300	720	320	2	1-leaf	10	85	89
VCO 10	1020	600	390	920	505	300	920	430	2	1-leaf	12	139	140
VCO 12	1220	600	390	1120	505	300	1120	430	3	1-leaf	18	169	170



LOCKING OPTIONS

Standardlocking	Optional locking systems			
				
Double-bit key locks	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)

Options for the entire series possible

* with emergency key, protruding approx 25 mm ** from VC 6 / VCO 6, other lock combinations are also possible



ACCESSORIES AT EXTRA CHARGE

Model	Inner safe Height = 130 mm	Inner safe Height = 200 mm	Left door hinge	Additional shelf
VC 2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VC 3	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VC 4	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VC 5	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VC 6	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VC 8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VCO 4	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VCO 5	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VCO 6	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VCO 8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VCO 10	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
VCO 12	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



WALL SAFES

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de





**MÜLLER
SAFE**



OFFICE SAFES

OFFICE SAFE BS



Model BS 1000



SECURITY LEVEL

Steel housing
Robust against access



DESIGN

Body: Double-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



OFFICE SAFE BS

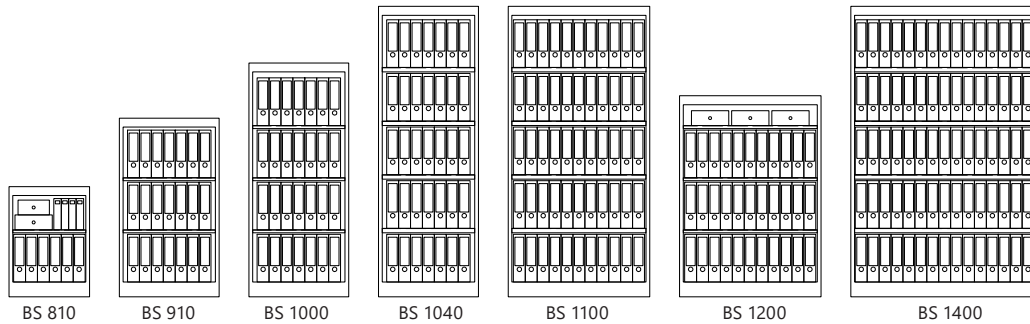

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
BS 810	740	540	550	620	490	450	580	410	1	1-flügelig	6	136	58
BS 910	1200	670	550	1070	620	450	1040	540	2	1-flügelig	21	292	95
BS 1000	1570	670	550	1420	620	450	1170	820	3	1-flügelig	28	396	125
BS 1040	1950	670	550	1820	620	450	1370	540	4	1-flügelig	35	502	142
BS 1100	1950	950	550	1820	900	450	1790	540	4	2-flügelig	55	729	174
BS 1200	1350	950	550	1200	900	450	1790	820	2	2-flügelig	33	486	135
BS 1400	1950	1260	550	1820	1210	450	1790	1130	4	2-flügelig	75	980	215

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems	
	Double-bit key lock	Mechanical combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
BS 810	■	■	■	■
BS 910	■	■	■	■
BS 1000	■	■	■	■
BS 1040	■	■	■	■
BS 1100	■	■	■	■
BS 1200	■	■	■	■
BS 1400	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 350 mm	Inner safe Height = 420 mm (2-leafs)	Left door hinge	Additional shelf	Telescope rails	Pull-out stop	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
BS 810	□	□	■	■	□	□	■	■
BS 910	■	□	■	■	■	■	■	■
BS 1000	■	□	■	■	■	■	■	■
BS 1040	■	□	■	■	■	■	■	■
BS 1100	□	■	□	■	■	■	■	■
BS 1200	□	■	□	■	■	■	■	■
BS 1400	□	■	□	■	■	■	■	■

* 1 shelf less

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



OFFICE SAFES

OFFICE SAFE BN



Model BN 152



SECURITY LEVEL

S1 according to EN 14450
A according to VDMA 24992 (Conditions May '95)



FIRE RATING

LFS 30 according to EN 15659



DESIGN

Body: Double-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 2 fixing holes in the floor



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement

OFFICE SAFE BN



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
BN 37	370	490	455	229	355	293	229	324	1	1-leaf	3	24	41
BN 47	470	380	455	329	245	293	329	214	1	1-leaf	3	24	40
BN 47S	470	490	455	329	355	293	329	324	1	1-leaf	4	34	48
BN 67	670	490	455	529	355	293	529	324	1	1-leaf	6	55	63
BN 82	820	490	455	679	355	293	679	324	1	1-leaf	8	71	72
BN 117	1170	700	510	1029	565	348	1029	534	2	1-leaf	21	202	129
BN 152	1520	700	510	1379	565	348	1379	534	3	1-leaf	28	271	157
BN 187	1870	700	510	1729	565	348	1729	534	4	1-leaf	35	340	188
BN 117/2	1170	950	510	1029	815	348	1029	784	2	2-leafs	30	292	156
BN 187/2	1870	950	510	1729	815	348	1729	784	4	2-leafs	50	490	220
BN 187/22	1870	1300	510	1729	1165	348	1729	1134	4	2-leafs	75	701	293

Fittings protrude 65 mm



LOCKING OPTIONS

Standardlocking	Optional locking systems		
Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*

Options for the entire series possible

* with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 180 mm	Inner safe Height = 350 mm (2-leaf)	Left door hinge	Additional shelf	Suspension file on telescopic rails	Shelf for hanging files	Special fixing kit for concrete floor
BN 37	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BN 47	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BN 47S	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BN 67	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BN 82	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BN 117	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BN 152	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BN 187	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BN 117/2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BN 187/2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
BN 187/22	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



OFFICE SAFES

OFFICE SAFE GN



Model GN 180 S



SECURITY LEVEL

S2 according to EN 14450
B according to VDMA 24992 (Conditions May '95)



DESIGN

Body: Double-walled
Door: Double-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 2 fixing holes in the floor, 2 in the backwall



LOCKING

High security double-bit key lock
2 keys (120 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



INSURABLE

Individual agreement

OFFICE SAFE GN



Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
GN 60	600	650	550	480	518	373	446	496	1	1-leaf	6	93	200
GN 60 S	600	650	550	480	518	373	446	496	1	1-leaf	6	93	300
GN 80	800	650	550	680	518	373	646	496	2	1-leaf	6	131	200
GN 80 S	800	650	550	680	518	373	646	496	2	1-leaf	6	131	300
GN 120	1200	650	550	1080	518	373	1046	496	2	1-leaf	18	209	200
GN 120 S	1200	650	550	1080	518	373	1046	496	2	1-leaf	18	209	300
GN 150	1500	650	550	1380	518	373	1346	496	3	1-leaf	18	267	200
GN 150 S	1500	650	550	1380	518	373	1346	496	3	1-leaf	18	267	300
GN 160	1600	650	550	1480	518	373	1446	496	3	1-leaf	24	286	300
GN 180	1800	650	550	1680	518	373	1646	496	4	1-leaf	26	325	350
GN 180 S	1800	1000	550	1680	868	373	1646	846	4	2-leafs	48	544	375

Fittings protrude 65 mm



LOCKING OPTIONS

Standardlocking	Optional locking systems		
Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*

Options for the entire series possible

* with emergency key



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe Height = 200 mm	Inner safe Height = 350 mm (2-leaf)	Left door hinge	Additional shelf	Suspension file on telescopic rails	Shelf for hanging files	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
GN 60	■	□	■	■	■	■	■	■
GN 60 S	■	□	■	■	■	■	■	■
GN 80	■	□	■	■	■	■	■	■
GN 80 S	■	□	■	■	■	■	■	■
GN 120	■	□	■	■	■	■	■	■
GN 120 S	■	□	■	■	■	■	■	■
GN 150	■	□	■	■	■	■	■	■
GN 150 S	■	□	■	■	■	■	■	■
GN 160	■	□	■	■	■	■	■	■
GN 180	■	□	■	■	■	■	■	■
GN 180 S	□	■	□	■	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



OFFICE SAFES

OFFICE SAFE DK



Model DK-195/2



SECURITY LEVEL

S2 according to EN 14450
B according to VDMA 24992 (Conditions May '95)



DESIGN

Body: Double-walled
Door: Multi-walled
Hinges: External
Door opening angle: 180°
Handle/fitting: Protruding 65 mm
Mounting holes: 1 fixing hole in the floor (2 fixing holes in the floor, if 2-leaf)



LOCKING

High security double-bit key lock
2 keys (95 mm)



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)




INSURABLE

Individual agreement



OFFICE SAFE DK

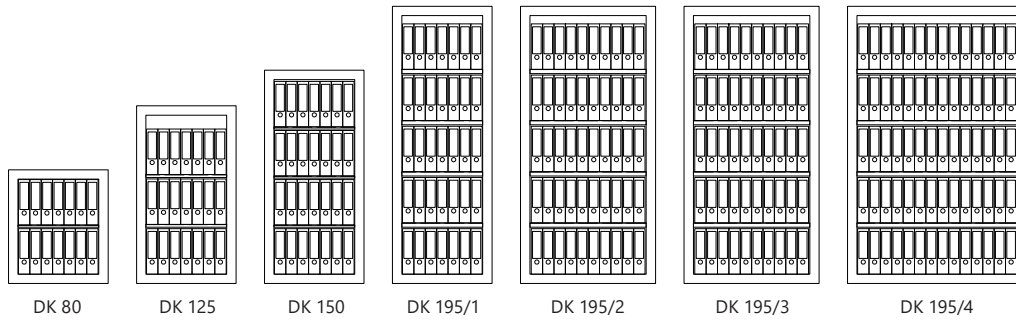

Model	External dim. in mm			Internal dim. in mm			Door light		Number Shelves	Door 1 / 2-leaf	Number Files	Volume (Liter)	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth	Height	Width					
DK 80	800	700	500	668	568	338	668	568	2	1-leaf	14	128	200
DK 125	1250	700	500	1118	568	338	1118	568	3	1-leaf	21	214	210
DK 150	1500	700	500	1368	568	338	1368	568	3	1-leaf	28	262	225
DK 195/1	1950	700	500	1818	568	338	1818	568	4	1-leaf	35	349	300
DK 195/2	1950	950	550	1818	818	388	1818	818	4	1-leaf	50	577	310
DK 195/3	1950	950	550	1818	818	388	1818	818	4	2-leafs	50	577	310
DK 195/4	1950	1260	550	1818	1128	388	1818	1128	4	2-leafs	75	866	390

Fittings protrude 65 mm



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems			
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
DK 80	■	■	■	■	■
DK 125	■	■	■	■	■
DK 150	■	■	■	■	■
DK 195/1	■	■	■	■	■
DK 195/2	■	■	■	■	■
DK 195/3	■	■	■	■	■
DK 195/4	■	■	■	■	■

* with emergency key ** other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Inner safe* Height = 390 mm	Inner safe* Height = 390 mm (2-leaf)	Left door hinge	Additional shelf	Suspension file on telescopic rails	Shelf for hanging files	Additional fixing hole for designated position Ø 13 mm	Special fixing kit for concrete floor
DK 80	■	□	■	■	■	■	■	■
DK 125	■	□	■	■	■	■	■	■
DK 150	■	□	■	■	■	■	■	■
DK 195/1	■	□	■	■	■	■	■	■
DK 195/2	■	□	■	■	■	■	■	■
DK 195/3	□	■	□	■	■	■	■	■
DK 195/4	□	■	□	■	■	■	■	■

* 1 shelf less

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



OFFICE SAFES

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de





MÜLLER
SAFE



KEY SAFES

KEY CABINET SC



Model SC 100



SECURITY LEVEL

Key cabinet with robust metal housing



DESIGN

Body: Single-walled
Door: Single-walled
Hinges: Internal
Door opening angle: 90°
Mounting holes: 4 fixing holes in the backwall
with height-adjustable, numbered, different colored hook bars



LOCKING

Cylinder locks
2 nickeled key per lock




PAINTING

Light gray, RAL 7035



KEY CABINET SC

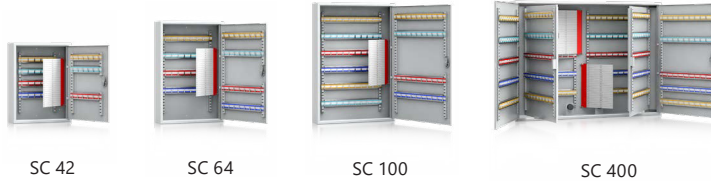

SC 42

SC 64

SC 100

SC 400

Model	External dim. in mm			Number Hooks	Door 1 / 2-leaf	Number Partition walls	Weight (Kg)
	Height	Width	Depth				
SC 42	350	270	80	42	1-leaf	0	4
SC 64	450	300	80	64	1-leaf	0	5
SC 100	550	380	80	100	1-leaf	0	8
SC 400	550	730	140	400	2-leaf	2	21



LOCKING OPTIONS

Standardlocking



Cylinder locks

Model	Cylinder locks
SC 42	■
SC 64	■
SC 100	■
SC 400	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



KEY SAFES

KEY CABINET KL / GL



Model KL 100



SECURITY LEVEL

Key cabinet with robust metal housing



DESIGN

Body: Single-walled
Door: Single-walled
Hinges: Internal
Door opening angle: 120°
Mounting holes: 4 fixing holes in the backwall with height-adjustable hook bars



LOCKING

Cylinder locks
2 keys



PAINTING

Light gray, RAL 7035



KEY CABINET KL / GL



KL 30 KL 50 KL 80 KL 100 KL 120 KL 150 KL 180 KL 200



GL 240 GL 320 GL 400

Model	External dim. in mm			Number Hooks	Door 1 / 2-leaf	Number Partition walls	Weight (Kg)
	Height	Width	Depth				
KL 30	550	380	80	30	1-leaf	0	6,0
KL 50	550	380	80	50	1-leaf	0	6,0
KL 80	550	380	80	80	1-leaf	0	6,5
KL 100	550	380	80	100	1-leaf	0	7,0
KL 120	550	380	140	120	1-leaf	1	9,0
KL 150	550	380	140	150	1-leaf	1	9,0
KL 180	550	380	140	180	1-leaf	1	9,5
KL 200	550	380	140	200	1-leaf	1	10,0
GL 240	550	746	140	240	2-leafs	2	16,0
GL 320	550	746	140	320	2-leafs	2	16,5
GL 400	550	746	140	400	2-leafs	2	17,0



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Cylinder lock	Mechanical combination lock	Electronic combination lock	Double-lock* (2 Cylinder locks)	Prepared for profiled half cylinder
KL 30	■	■	■	■	■
KL 50	■	■	■	■	■
KL 80	■	■	■	■	■
KL 100	■	■	■	■	■
KL 120	■	■	■	■	■
KL 150	■	■	■	■	■
KL 180	■	■	■	■	■
KL 200	■	■	■	■	■
GL 240	■	■	■	■	■
GL 320	■	■	■	■	■
GL 400	■	■	■	■	■


*other lock combinations possible

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



KEY SAFES

KEY CABINET GP

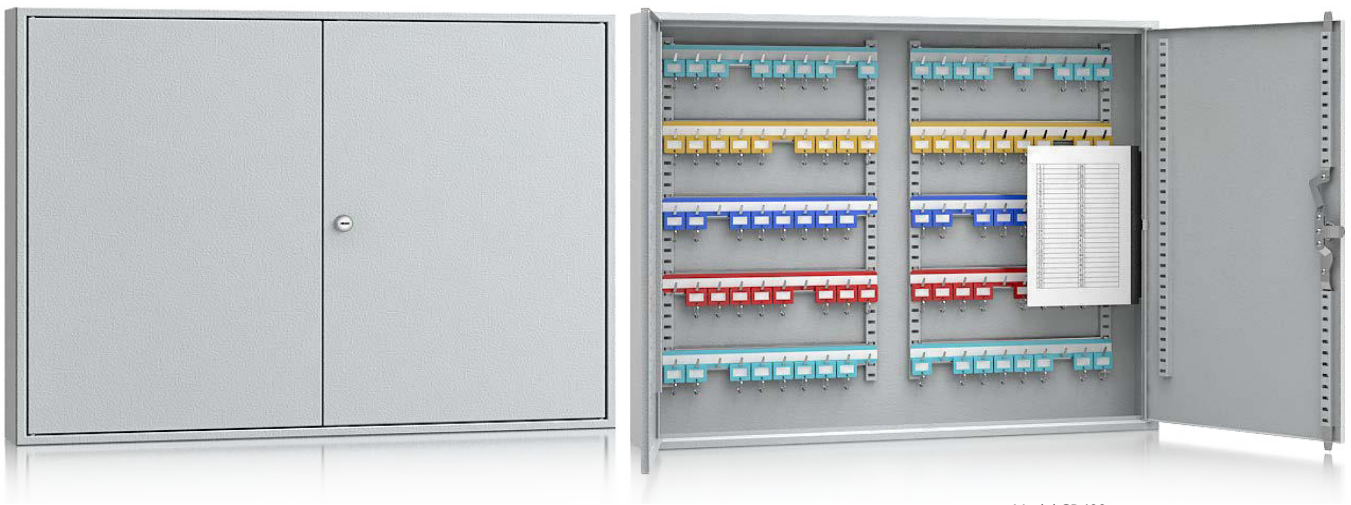

Model GP 100



SECURITY LEVEL

Key cabinet with robust metal housing



DESIGN

Body: Single-walled
Door: Single-walled
Hinges: Internal
Door opening angle: 120°
Mounting holes: 4 fixing holes in the backwall
Adjustable, colourful and numbered hook bars. Index holder in standard.



LOCKING

Cylinder lock
2 keys



PAINTING

Light gray, RAL 7035



KEY CABINETS GP



GP 100


GP 200

GP 300

GP 400

GP 500

GP 600



GP 780



GP 860



GP 940



GP 1020



GP 1170

Model	External dim. in mm			Internal dim. in mm			Number Hooks	Door 1 / 2-leaf	Weight (Kg)
	Height	Width	Depth	Height	Width	Depth			
GP 100	550	730	80	548	728	79	100	2-leafs	14,5
GP 200	550	730	80	548	728	79	200	2-leafs	15,0
GP 300	550	730	140	548	728	139	300	2-leafs	19,0
GP 400	550	730	140	548	728	139	400	2-leafs	19,5
GP 500	550	730	205	548	728	204	500	2-leafs	25,5
GP 600	550	730	205	548	728	204	600	2-leafs	26,0
GP 780	1300	730	250	1298	728	249	780	2-leafs	59,0
GP 860	1300	730	250	1298	728	249	860	2-leafs	59,5
GP 940	1300	730	250	1298	728	249	940	2-leafs	60,0
GP 1020	1300	730	250	1298	728	249	1020	2-leafs	60,5
GP 1170	1300	730	250	1298	728	249	1170	2-leafs	61,5



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems	
	 Cylinder lock	 Electronic combination lock	 Prepared for profiled half cylinder
GP 100	■	■	■
GP 200	■	■	■
GP 300	■	■	■
GP 400	■	■	■
GP 500	■	■	■
GP 600	■	■	■
GP 780	■	■	■
GP 860	■	■	■
GP 940	■	■	■
GP 1020	■	■	■
GP 1170	■	■	■


*other lock combinations possible

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



KEY SAFES

KEY CABINETS G / GG

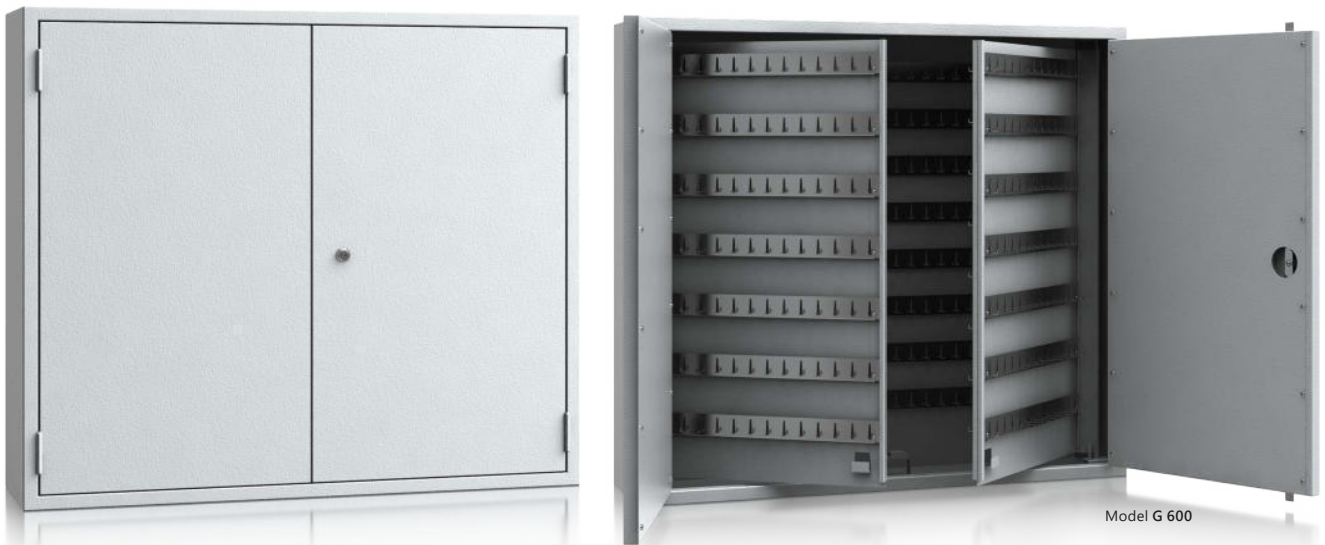

SECURITY LEVEL

Key cabinet with robust metal housing



DESIGN

Body: Single-walled

Door: Double-walled

Hinges: External

Door opening angle: 180°

Mounting holes: 4 fixing holes in the backwall

The G and GG models are double-leaved, with two partition walls that can be swiveled in opposite directions. The partition walls are equipped with key strips on both sides. Expandable by re-ordering additional key bars for screwing in. Available as a wall cabinet or free-standing model with a square tubular frame (the free-standing version requires additional wall mounting).



LOCKING

Cylindrical lock with basquill lock
2 keys



PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



KEY CABINET G / GG



Model	External dim. in mm			Hook bars (à 13 H.)		Space between 2 bars		Number Hooks	Door 1 / 2-leaf	Weight (Kg)
	Height	Width	Depth	Backwall	Partition wall	Backwall	partition wall			
G 260	800	900	220	10 bars	10 bars	125x30	125x30	260	2-leafs	48,0
G 300	800	900	220	8 bars	16 bars	160x30	160x30	312	2-leafs	48,8
G 360	800	900	220	12 bars	16 bars	95x30	160x30	364	2-leafs	49,6
G 420	800	900	220	12 bars	20 bars	95x30	125x30	416	2-leafs	50,4
G 500	800	900	220	14 bars	24 bars	80x30	95x30	494	2-leafs	51,6
G 600	800	900	220	16 bars	30 bars	70x30	70x30	598	2-leafs	53,2
G 700	800	900	220	18 bars	36 bars	70x30	70x30	702	2-leafs	54,8
GG 780	1300	900	220	20 bars	40 bars	95x30	95x30	780	2-leafs	60,0
GG 860	1300	900	220	22 bars	44 bars	85x30	85x30	858	2-leafs	61,2
GG 940	1300	900	220	24 bars	48 bars	75x30	75x30	936	2-leafs	62,4
GG 1010	1300	900	220	26 bars	52 bars	70x30	65x30	1014	2-leafs	63,6
GG 1090	1300	900	220	28 bars	56 bars	65x30	60x30	1092	2-leafs	64,8



LOCKING OPTIONS

Model	Standardlocking		Optional locking system	
	Cylinder lock	Electronic combination lock	Double lock* (2 cylinder locks)	Prepared for profiled half cylinde
G 260	■	■	■	■
G 300	■	■	■	■
G 360	■	■	■	■
G 420	■	■	■	■
G 500	■	■	■	■
G 600	■	■	■	■
G 700	■	■	■	■
GG 780	■	■	■	■
GG 860	■	■	■	■
GG 940	■	■	■	■
GG 1010	■	■	■	■
GG 1090	■	■	■	■

*other lock combinations possible

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



KEY SAFES

KEY SAFE MST 0



Model MST 0-100



SECURITY LEVEL

Class 0 to EN 1143-1
certified by ECB-S



DESIGN

Body: Double-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Mounting holes: 1 fixing hole in the floor

Also available as a version for car keys (longer hooks).



LOCKING

High security double-bit key lock
2 keys (95 mm)




PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



KEY SAFE MST 0

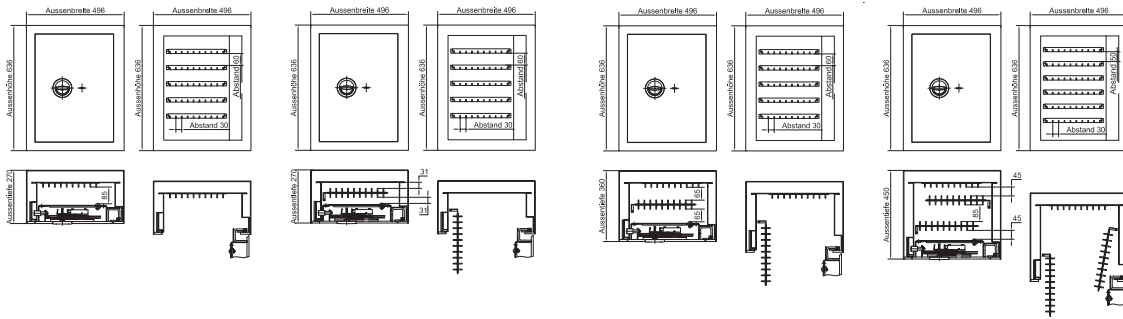

MST 0-50

MST 0-100

MST 0-150

MST 0-300

Model	External dim. in mm			Distribution of the key bars	Number Hooks	Door 1 / 2-leaf	Weight (Kg)
	Height	Width	Depth				
MST 0-50	636	496	270	5 bars with 10 hooks each on the back wall	max. 50	1-leaf	85
MST 0-100	636	496	270	1 partition wall, 5 strips per side, each with 10 hooks	max. 100	1-leaf	90
MST 0-150	636	496	360	5 strips with each 10 hook backwall, 1 partition wall, 5 bars per side with 10 hooks each	max. 150	1-leaf	112
MST 0-300	636	496	450	6 strips with 10 hooks each on the back wall; 2 partition walls, per side 6 strips with 10 hooks each	max. 300	1-leaf	126



LOCKING OPTIONS

Model	Standardlocking		Optional locking systems		
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
MST 0-50	■	■	■	■	■
MST 0-100	■	■	■	■	■
MST 0-150	■	■	■	■	■
MST 0-300	■	■	■	■	■

* with emergency key, protruding approx 25 mm **other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Base (closed) up to a height of 900 mm	Left door hinge	Additional fixing hole for designated position $\varnothing = 13$ mm	Spezial fixing kit for concrete floor
MST 0-50	■	■	■	■
MST 0-100	■	■	■	■
MST 0-150	■	■	■	■
MST 0-300	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



KEY SAFES

KEY SAFE MST I



Model MST I-100



SECURITY LEVEL

Class I to EN 1143-1
certified by ECB-S



DESIGN

Body: Double-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Mounting holes: 1 fixing hole in the floor

Also available as a version for car keys (longer hooks).



LOCKING

High security double-bit key lock
2 keys (95 mm)




PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



KEY SAFE MST I

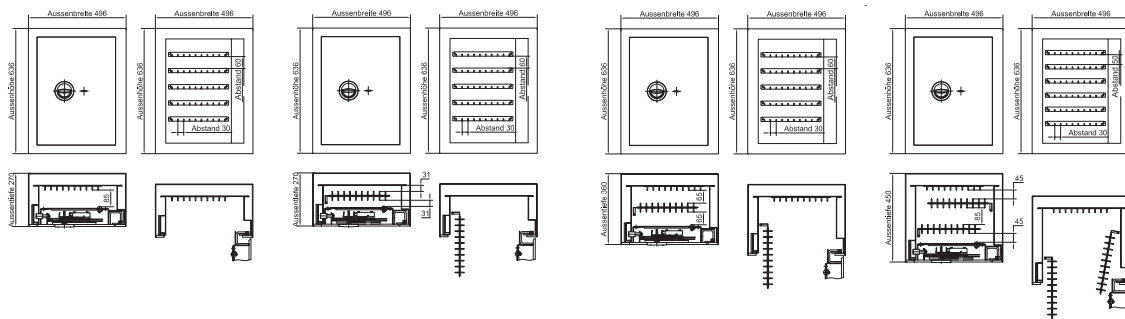

MST I-50

MST I-100

MST I-150

MST I-300

Model	External dim. in mm			Distribution of the key bars	Number Hooks	Door 1 / 2-leaf	Weight (Kg)
	Height	Width	Depth				
MST I-50	636	496	270	5 bars with 10 hooks each on the back wall	max. 50	1-leaf	85
MST I-100	636	496	270	1 partition wall, 5 strips per side, each with 10 hooks	max. 100	1-leaf	90
MST I-150	636	496	360	5 strips with each 10 hook backwall, 1 partition wall, 5 bars per side with 10 hooks each	max. 150	1-leaf	112
MST I-300	636	496	450	6 strips with 10 hooks each on the back wall; 2 partition walls, per side 6 strips with 10 hooks each	max. 300	1-leaf	126



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems			
	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*	Double lock** (2 Double-bit key locks)
MST 0-50	■	■	■	■	■
MST 0-100	■	■	■	■	■
MST 0-150	■	■	■	■	■
MST 0-300	■	■	■	■	■

* with emergency key, protruding approx 25 mm **other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

Model	Base (closed) up to a height of 900 mm	Left door hinge	Additional fixing hole for designated position Ø = 13 mm	Spezial fixing kit for concrete floor
MST I-50	■	■	■	■
MST I-100	■	■	■	■
MST I-150	■	■	■	■
MST I-300	■	■	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



KEY SAFES

KEY SAFE SBN



Model SBN 140



SECURITY LEVEL

S2 according to EN 14450
B according to VDMA 24992 (Conditions May '95)



DESIGN

Body: Double-walled
Door: Double-walled
Hinges: External
Door opening angle 180°
Handle / fitting: Protruding 25 mm
Mounting hoels: 2 fixing holes in the floor, 2 in the backwall
Safes with pull-out partitions, hook rails infinitely adjustable, colored but not numbered



LOCKING

High security double-bit lock
2 keys (65 mm)




PAINTING

Light gray, RAL 7035





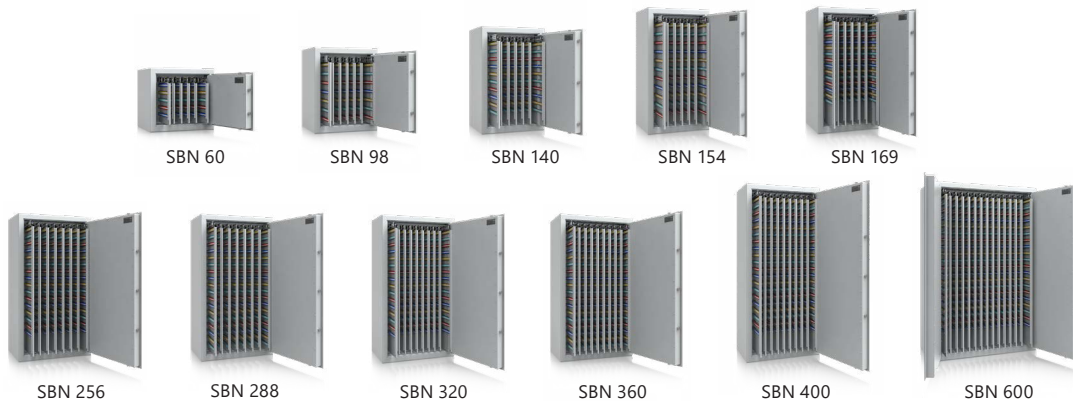

KEY SAFE SBN



Model	External dim. in mm			Number Hooks	Number Partition wall	Door 1/2-leaf	Weight (Kg)
	Höhe	Breite	Tiefe				
SBN 60	600	636	500	600	6	1-leaf	300
SBN 98	800	636	500	980	7	1-leaf	300
SBN 140	1000	636	500	1400	7	1-leaf	300
SBN 154	1200	636	500	1540	7	1-leaf	300
SBN 169	1200	636	500	1960	7	1-leaf	300
SBN 256	1500	806	500	2560	8	1-leaf	350
SBN 288	1500	806	500	2880	8	1-leaf	350
SBN 320	1500	806	500	3200	10	1-leaf	350
SBN 360	1500	806	500	3600	10	1-leaf	350
SBN 400	1800	806	500	4000	10	1-leaf	450
SBN 600	1800	1200	500	6000	15	2-leaf	650







LOCKING OPTIONS

Standardlocking	Optional locking systems		
 <p>Double-bit key lock</p>	 <p>Mechanical combination lock</p>	 <p>Electronic combination lock</p>	 <p>Double lock* (2 Double-bit key locks)</p>



Options for the entire series possible
* other lock options are also possible



ACCESSORIES FOR EXTRA CHARGE

Model	Base (closed) up to a height of 900 mm	Left door hinge	Additional fixing hole for designated position $\varnothing = 13$ mm	Spezial fixing kit for concrete floor
				

Options for the entire series possible

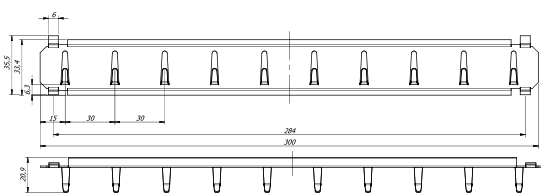

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



KEY SAFES

KEY SAFE STZ



Model STZ 140



SECURITY LEVEL

S2 according to EN 14450
B according to VDMA 24992 (Conditions May '95)



DESIGN

Body: Double-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Safes with pull-out partitions, hook bars continuously adjustable

Also available as a version for car keys (longer hooks).



LOCKING

High security double-bit key lock
2 keys (65 mm)



PAINTING

Anthracite gray, RAL 7016



KEY SAFE STZ




Model	External dim. in mm			Number Hooks	Number Partition wall	Door 1 / 2 leaf	Mounting holes		Weight (Kg)
	Höhe	Breite	Tiefe				Backwall	Floor	
STZ 60	450	450	200	60	0	1-leaf	4	0	31
STZ 100	600	450	200	100	0	1-leaf	6	0	38
STZ 140	800	450	200	140	0	1-leaf	6	0	46
STZ 200	600	450	250	200	1*	1-leaf	6	0	43
STZ 280	800	450	250	280	1*	1-leaf	6	0	52

* Swivel panel, ** key panels on telescopic extension



LOCKING OPTIONS

Model	Standardlocking	Optional locking systems
		 Double-bit key lock
STZ 60	■	■
STZ 100	■	■
STZ 140	■	■
STZ 200	■	■
STZ 280	■	■

As of 01/2022 - decorative material not included in the scope of delivery- Technical changes reserved.



KEY SAFES

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de

